


Note:  
 Owner shall locate, protect, relocate and/or replace 8" dia. conc. irrigation line existing along W. side of Huntington Street. Disposition of pipe line shall be to Coge Canal Company Satisfaction. Telephone 683-5228, 48 hours prior to commencing any work. No work in street R/W between 7<sup>th</sup> & 12<sup>th</sup> of the month. Approval as to Disposition of Irrigation lines GAGE CANAL CO.  
 Date: 10/30/76  
 Robert Taylor  
 Manager

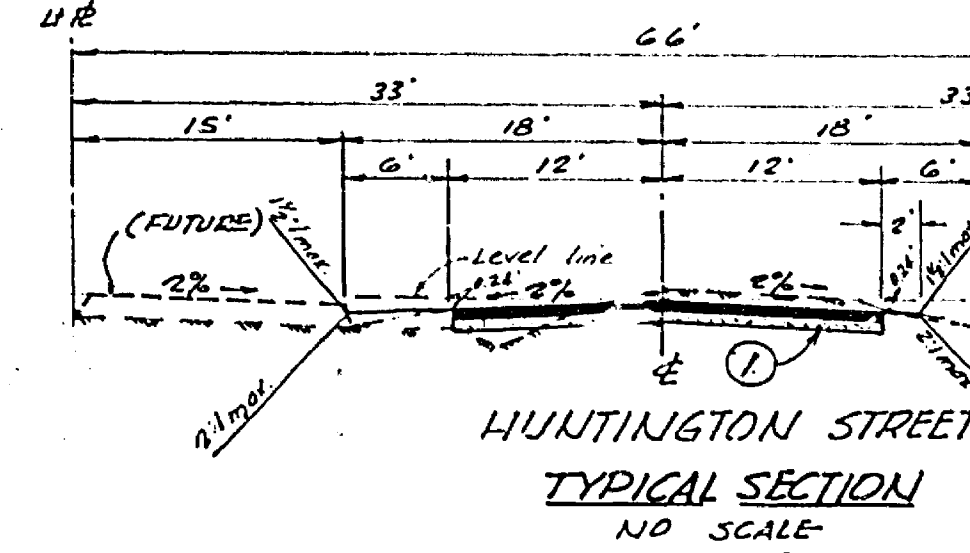

- GENERAL NOTES**
- All overhanging tree limbs that are less than 15' above the street grade shall be trimmed back.
  - Turn edge of existing pavement where new pavement joins to a smooth, straight line. Construct make-up paving as shown on plan and overlay paving as directed in the field to produce a smooth section.
  - Construction shall be in accordance with the Standard Specifications for Public Works Construction 1976 Edition and per City of Riverside Standard Drawings.
  - The Subdivider shall arrange for a soils test to be made by a Soils Engineer after the Street has been prepared to rough grade. Depth of base material and A.C. paving shall be determined by the City of Riverside design standards and test procedures.
  - It shall be the responsibility of the Contractor to clear the right-of-way in accordance with the provisions of Law as it affects each utility including irrigation lines and appurtenances, and at no cost to the City.
  - Staking will be bluetops on E and E.R. set at top of subgrade, at 25' intervals.
  - All traffic signs shall be installed prior to opening the streets to traffic.
- CONSTRUCTION NOTES**
- Construct 8" A.C. paving over 5" D.G. or 4" A.C. over compacted native soil.
  - Adjust to grade by City Utility Dept.
  - Remove item shown
  - Trim back overhanging tree limbs less than 15' above street grade.
  - Relocate to clear construction
  - Remove existing pavement where cross-hatched and regrade smooth transition to existing ground.
  - (55.88) denotes existing Elevation; 56.00 F.G. denotes finish grade
  - All existing A.C. paving to be removed on Huntington Street
  - Construct A.C. drive approach, width: 20'; Exact location to be determined at time of construction.
  - E.G.C. Top of yellow painted bolt at base of vent pipe set on south side of pump station slab on N.W. corner of Washington and Bradley. El. 1083.278.
  - Construct drainage swales across A.C. drive approaches to conform with grade of finish shoulder (out 6' from E.R.) (cont. 5 A.C. lanes also as shown)
  - Where Gage Irrig. line falls under proposed A.C. paving, replace with 6" dia. x 180' A.C. pipe, 30' cover.

APPROVED BY <i>Robert Taylor</i> CIVIL ENGINEER RIVERSIDE, CALIFORNIA DATE: 11-11-76 RCE 10470		CITY OF RIVERSIDE, CALIFORNIA DEPARTMENT OF PUBLIC WORKS APPROVED BY PRINCIPAL ENGINEER PARK DEPARTMENT TRAFFIC DIVISION CHIEF P. W. ENGR. DATE: 12-6-76		STREET PLAN AND PROFILE HUNTINGTON STREET WASHINGTON ST. TO SUMMIT ST. P M 7620 HORIZ. SCALE: 1" = 40' VERT. SCALE: 1" = 4' PROJECT NO. R-1923 SHEET 1 OF 1 FILE NO.
---	--	---	--	---