



TYPICAL CUT SECTION  
NO SCALE  
FENCE TO FOLLOW TOP OF CUT.

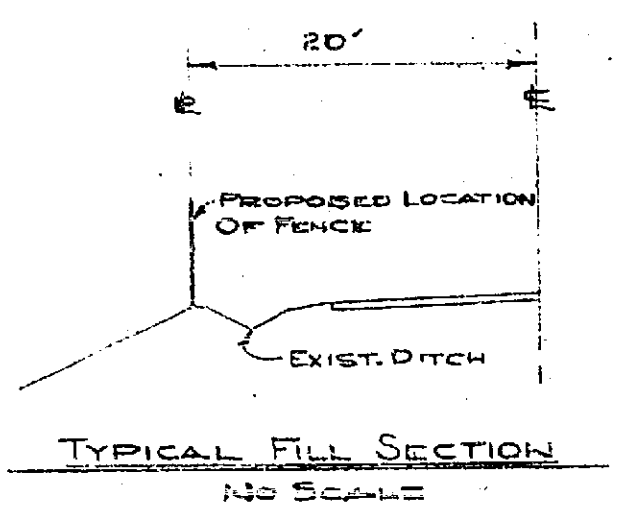

TYPICAL FILL SECTION  
NO SCALE  
FENCE TO BE ON R.O. OR IN A STRAIGHT LINE ON SLOPE, AS DIRECTED BY ENGINEERS.

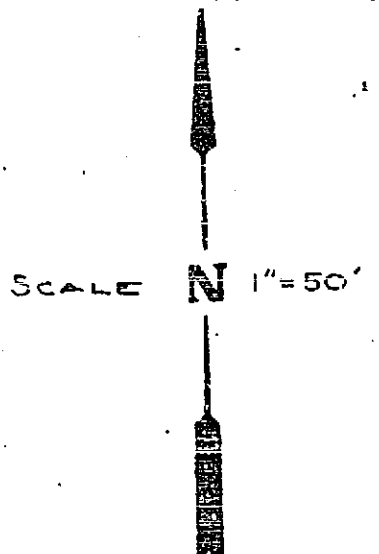

APPROXIMATE QUANTITIES

2 1/2" A.C.	1708 S.F.
EXCAVATION	70 C.Y.
2" x 4" REDWOOD HEADER	263 L.F.
FENCE RELOCATION	1350 L.F.

- NOTES:
1. THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE PORTIONS OF STANDARD SPEC. NS 481, INCLUDING THE REQUIREMENTS FOR INSURANCE AND BONDS (17-10 AND 17).
  2. THE CONTRACTOR WILL BE ALLOWED 15 CALENDAR DAYS AFTER NOTICE TO BEGIN IS GIVEN BY THE CITY ENGINEER TO COMPLETE THIS PROJECT.
  3. LIQUIDATED DAMAGES SHALL BE IN THE AMOUNT OF \$150 PER DAY.
  4. EXISTING FENCE POSTS ARE SET IN CONCRETE.
  5. FENCE POST SHALL NOT BE RESET IN CONCRETE, BUT CONTRACTOR MAY ELECT TO RELOCATE THE EXISTING CONCRETE BASE WITH THE FENCE POST.

REVISIONS			CITY OF RIVERSIDE, CALIFORNIA DEPARTMENT OF PUBLIC WORKS	
MARK	DATE	DESCRIPTION		
			<b>CENTRAL AVE.</b>	
			WEST OF HILLSIDE AVE.	
			FENCE RELOCATION AND DRIVEWAY RECONSTRUCTION	
DESIGNED BY D.E.	SUBMITTED BY W.L.B.	APPROVED BY <i>[Signature]</i>	PROJECT NO. 3059	
DRAWN BY A.F.W.	PARK DEPT. TRAFFIC DIV.	DATE 2-21-63	R-515A	SHEET 1 OF 1
CHECKED BY D.A.C.	RECOMMENDED BY <i>[Signature]</i>			