


| | |
|-------------|------|
| PROJECT | DATE |
| NOTE BOOK | |
| PLAN NUMBER | |
| DATE | |

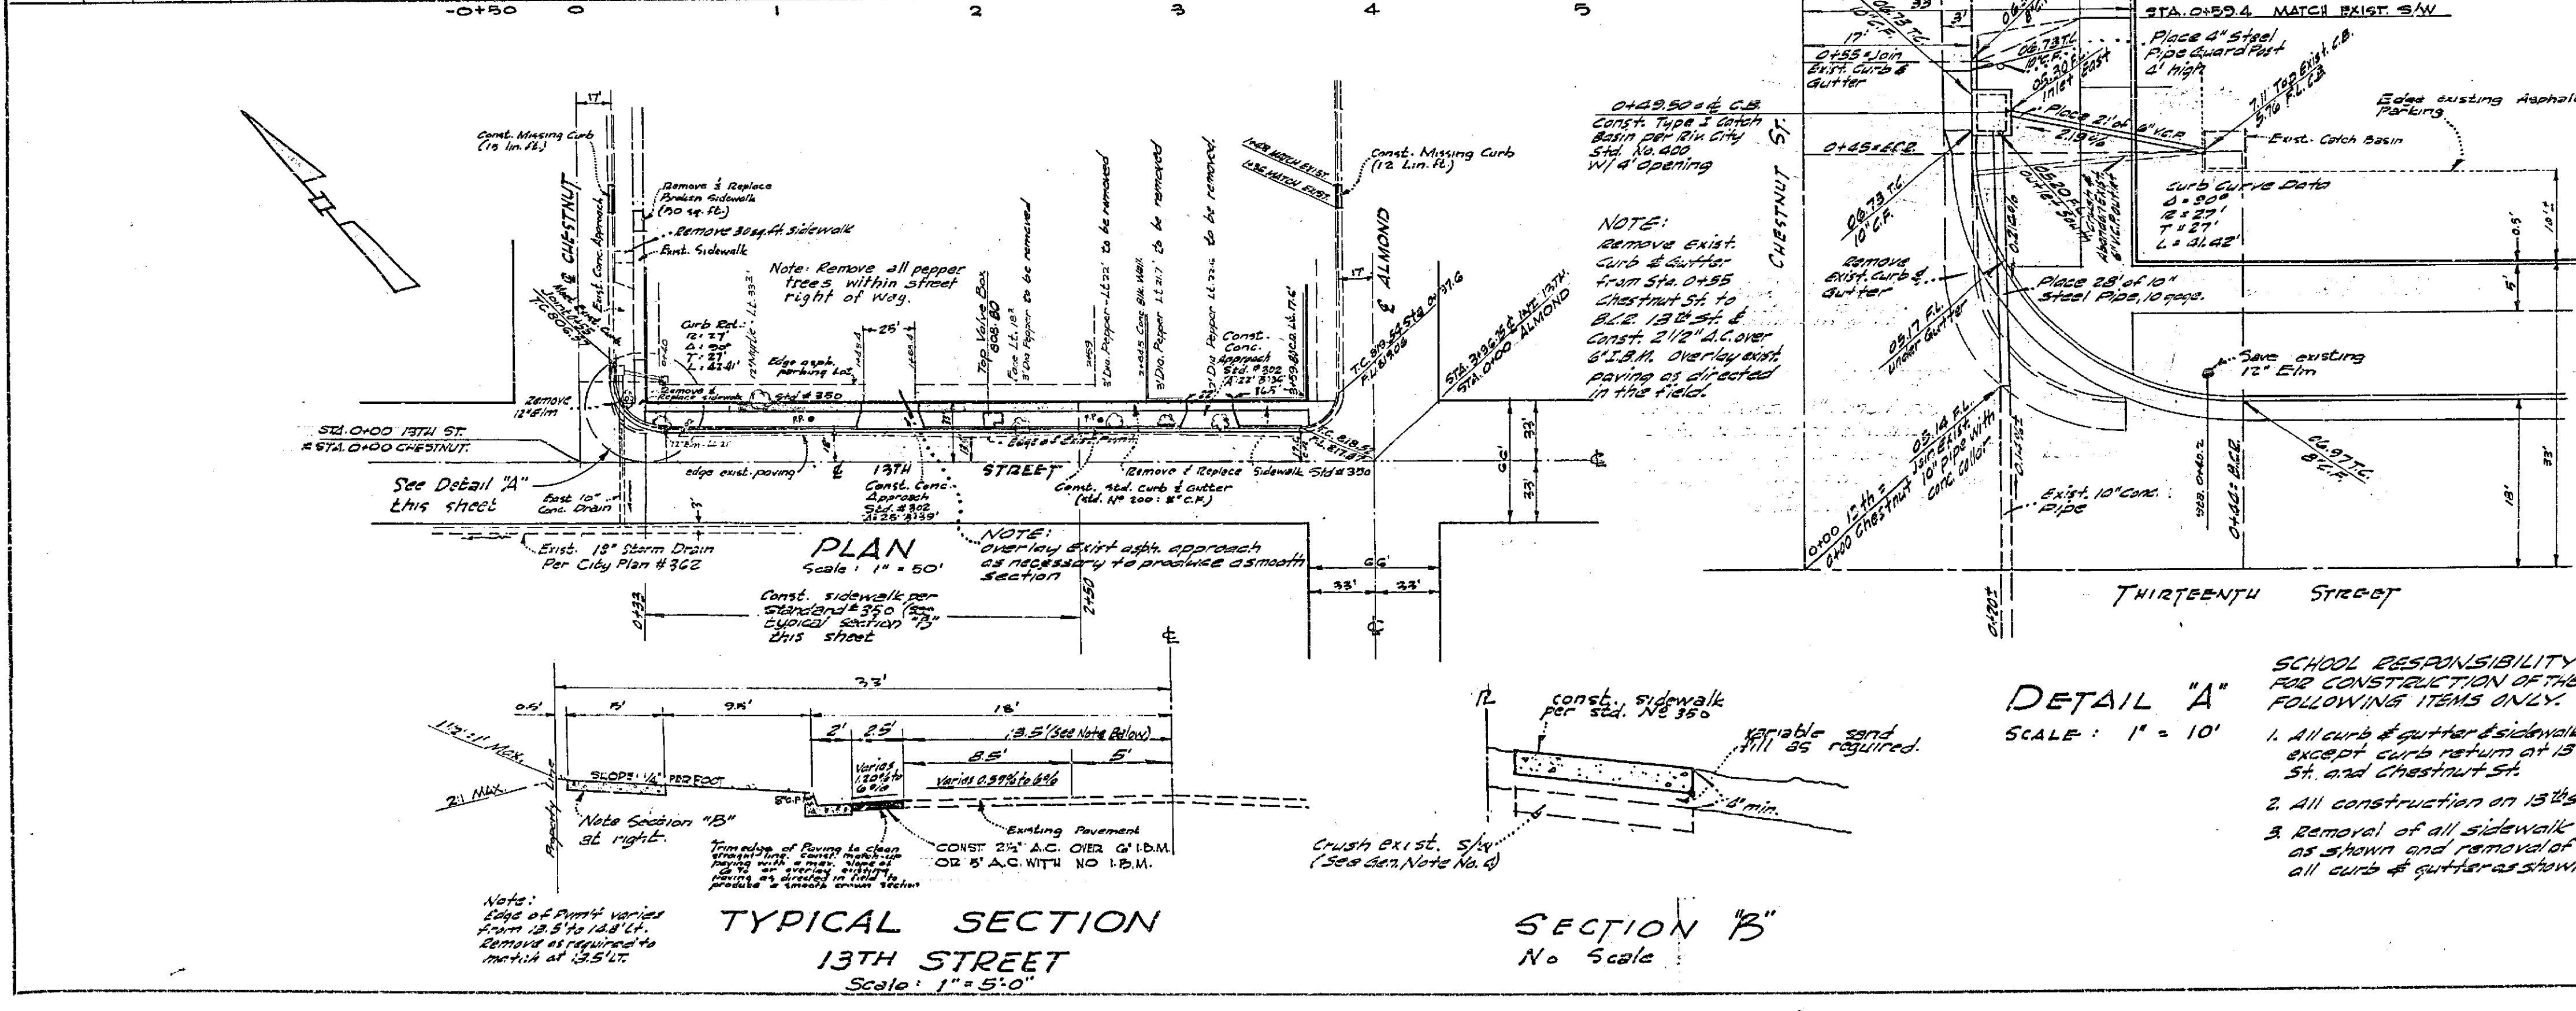

GENERAL NOTES

- It shall be the responsibility of the Contractor to clear the right of way in accordance with the provisions of the law as it affects each utility, including irrigation lines and appurtenances and at no cost to the City.
- Construction shall be in accordance with the City of Riverside, Department of Public Works, Specifications No. 461 and standard Drawings.
- Prisms Cost and Binder are required.
- Existing sidewalk on 13th St. to be removed & replaced except shaded area (from sta 0+33 to sta 2+00) which may be crushed and capped.
- Lower edge of sidewalk between stations 2+02.45 & 2+11.55 to be flush with top of existing valve box (Elev. 808.80). This section of sidewalk to be joined by straight grade transition sections to standard sidewalk grades @ 10' on either side of valve box.

Bench Mark: 6" L in curb 11th St., 8' East of Easterly line of Chestnut St. Elevation = 835.15

Sidewalk and curb rubble to be disposed of at city landfill.

APPROVED: *[Signature]*
CRAWLEY & HAWKINS
SURVEYORS AND ENGINEERS
Riverside, California
Approved: *[Signature]* Field By: *[Signature]*
C.E. No. 9455 Date: 6-29-64

| REVISIONS | |
|-----------|------|
| MARK | DATE |
| | |
| | |

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

STREET PLAN & PROFILE

**THIRTEENTH STREET:
FROM CHESTNUT TO ALMOND**

DESIGNED BY: *[Signature]* CHECKED BY: *[Signature]*
DRAWN BY: *[Signature]* DATE: 8-4-64

RECOMMENDED BY: *[Signature]* ASSISTANT CITY ENGINEER

APPROVED BY: *[Signature]* DIRECTOR OF PUBLIC WORKS

R-790
SHEET 1 OF 1

| | |
|-------------|------|
| PLAN | DATE |
| SECTION | |
| REVISIONS | |
| MARK | DATE |
| DESCRIPTION | |