


TOP VIEW

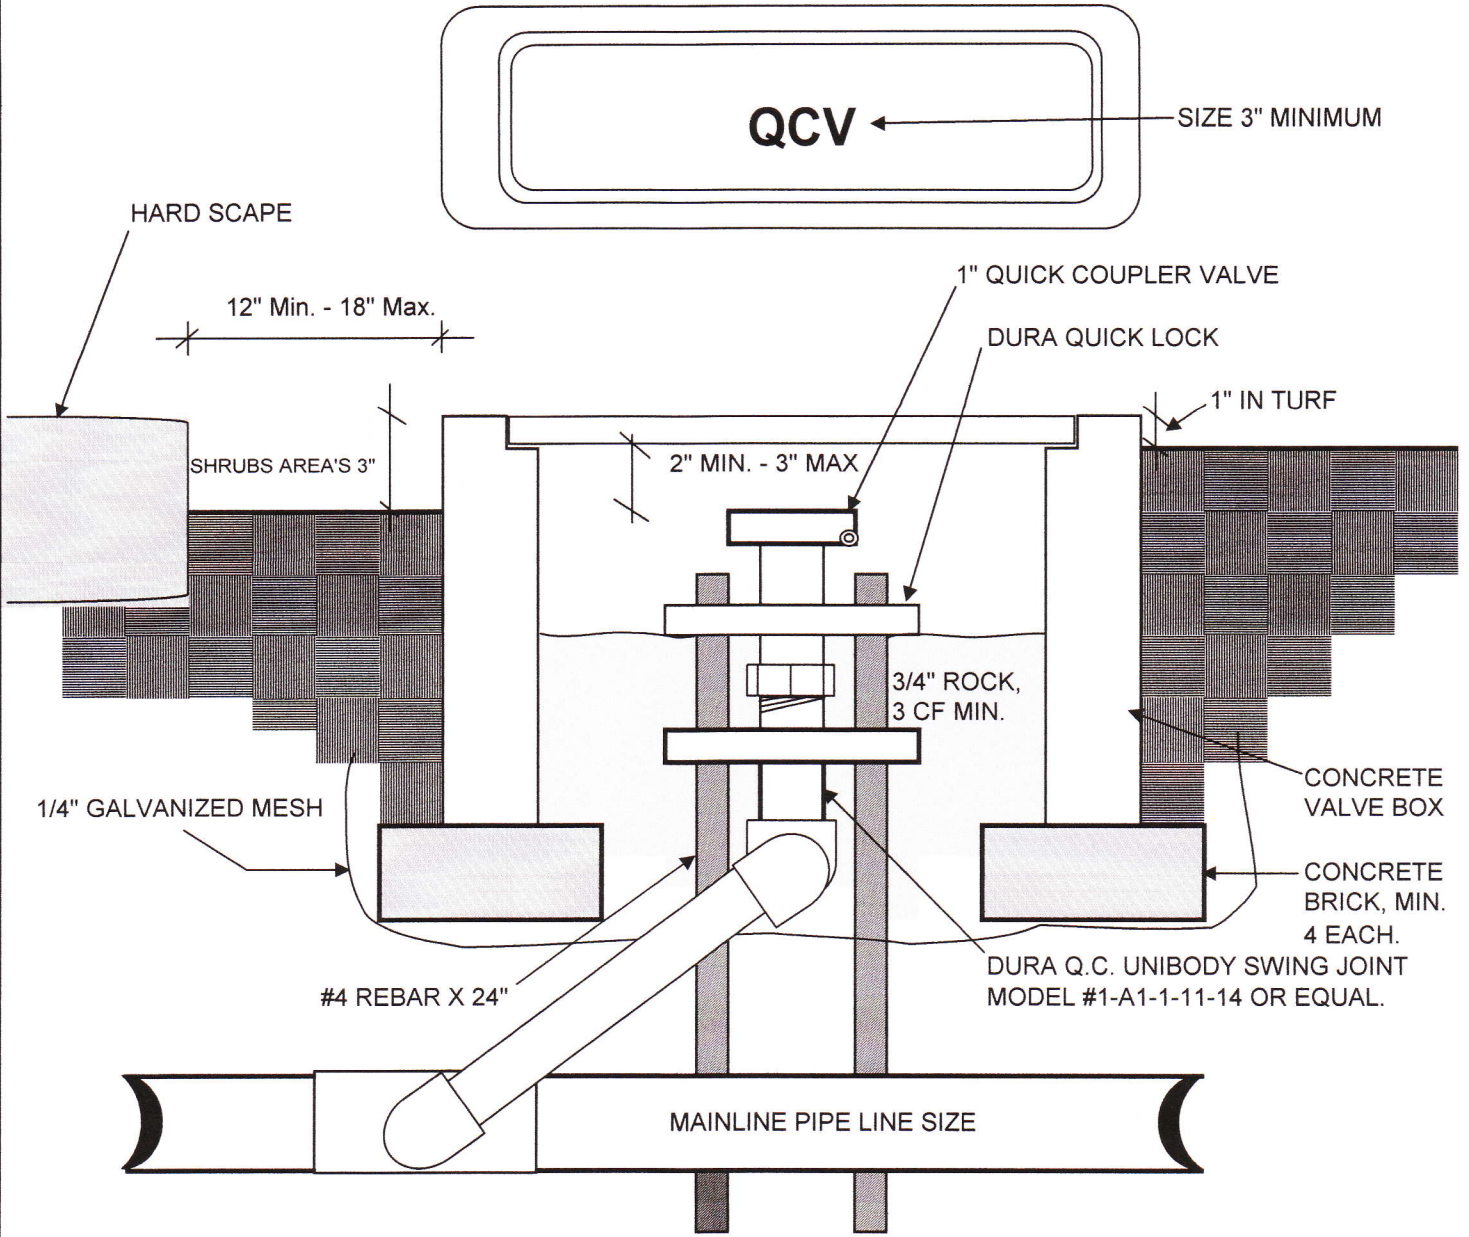

Construction Notes

- 1) The contractor shall ensure that the hexagons between the quick lock and the swing joint are aligned.
- 2) All boxes shall have a minimum 3' foot space between each other.

NOT TO SCALE

Approved	Date
P.V.	5/27/08
Revised	Date

Public Works Department, Forestry and Landscape Division
CITY OF RIVERSIDE

QUICK COUPLER IN VALVE BOX

Detail No.
2014