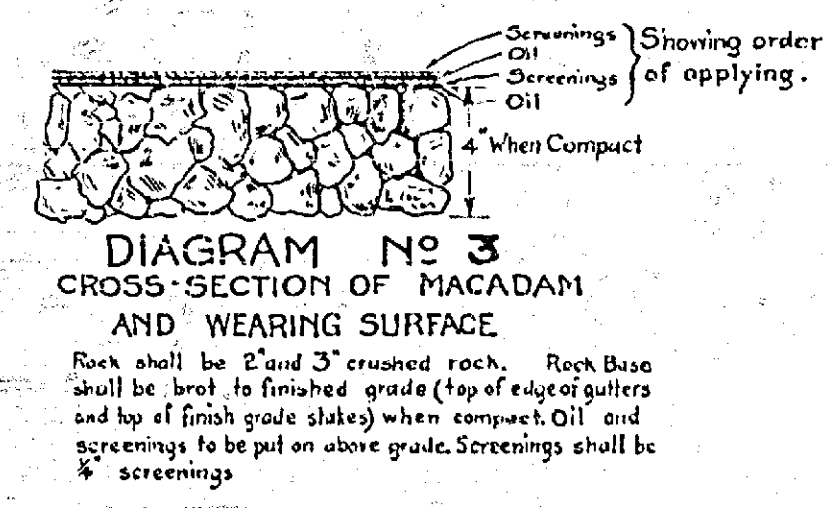


LONGITUDINAL SECTION
**DIAGRAM NO 2, SHOWING THE
 DETAILS OF ALLEY ENTRANCE
 TO BE MADE AT B. 3 X 8, RANGE 2.
 TO BE CONSTRUCTED ACCORDING TO SPECI-
 FICATIONS NO 23 FOR GUTTER CONSTRUCTION,
 EXCEPTING THEREFROM PARAGRAPHS 2 X 3.**



**DIAGRAM NO 3
 CROSS-SECTION OF MACADAM
 AND WEARING SURFACE**
 Rock shall be 2" and 3" crushed rock. Rock Base
 shall be brot to finished grade (top of edge of gutters
 and top of finish grade slabs) when compact. Oil and
 screenings to be put on above grade. Screenings shall be
 5" screenings

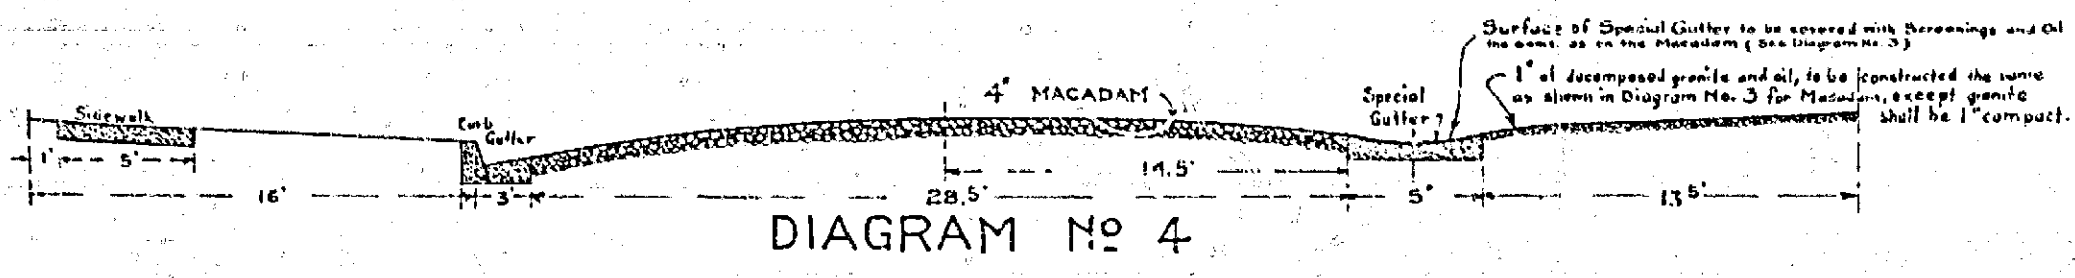
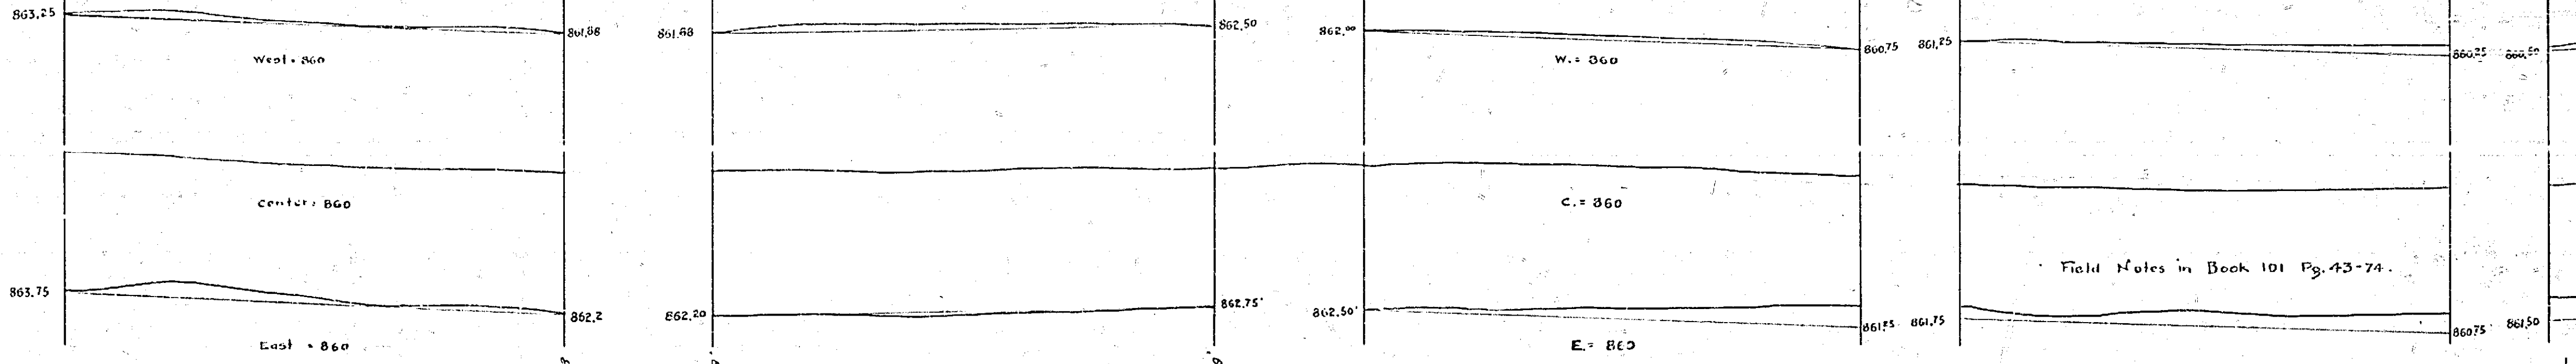


DIAGRAM NO 4


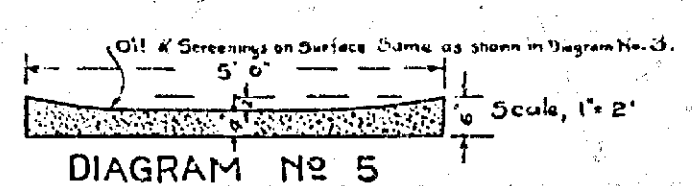


DIAGRAM NO 5
 Special gutter to be constructed
 according to gutter specifications, no. 23.

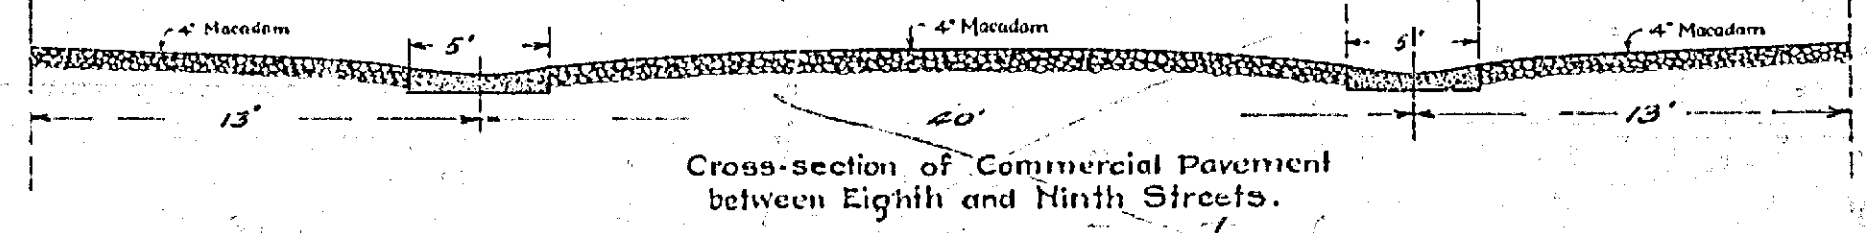




Cross-section of Commercial Pavement
 between Eighth and Ninth Streets.

MAP SHOWING IMPROVEMENTS TO BE MADE ON **VINE ST** FROM

FIRST ST. TO NINTH ST.

A. P. Campbell,
City Engineer.

SCALE
1 INCH HOR. = 60 FT.
1 INCH VER. = 6 FT.

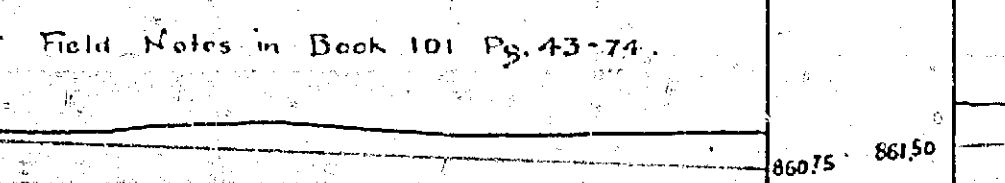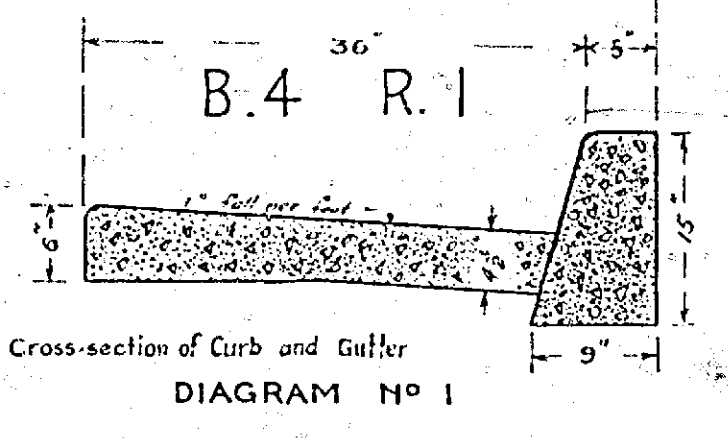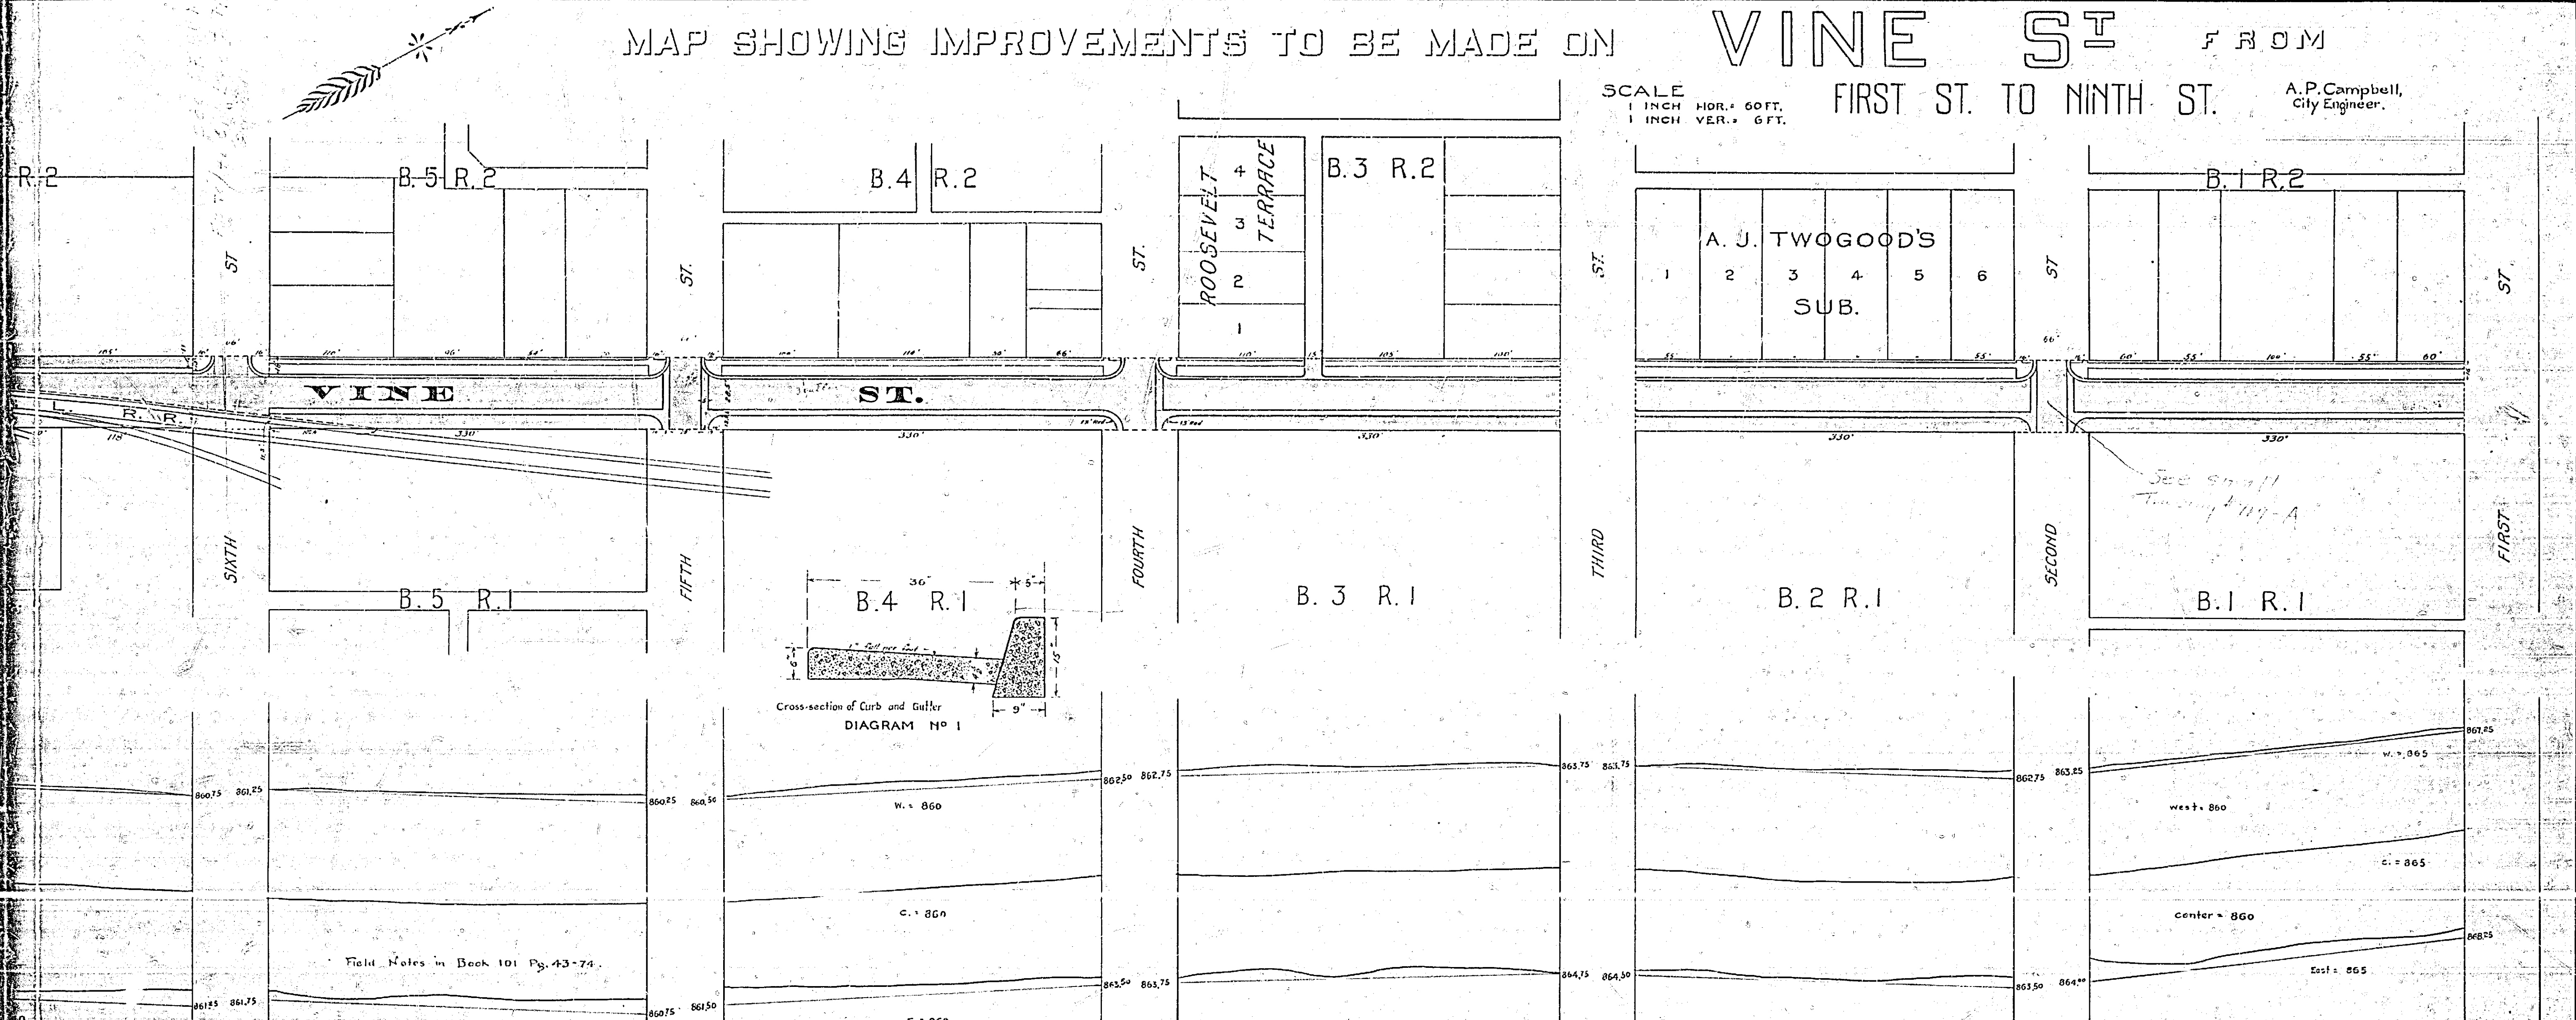

EXPLANATORY NOTES

- Cement Sidewalk to be constructed is shown thus:
- Cement Curb to be constructed is shown thus:
- Covered Gutter to be constructed according to Diagram No. 1 is shown thus:
- Special Concrete Gutter to be constructed according to Diagram No. 3 is shown thus:
- Alley Entrances to be constructed according to Diagram No. 2 are shown thus:
- Macadam Roadway to be constructed according to Diagram No. 3 is shown thus:

Decomposed Granite roadway to be constructed according to Diagram No. 4 is shown thus:

Adopted by the Mayor and Common Council of the City of Riverside, Calif.
March 23, 1915
Attest City Clerk.

719-A

FRAME 1 OF 2

35
11
82
28
11
11