


- GENERAL NOTES - CONTINUED**
11. THE CONTRACTOR SHALL CALL IN A LOCATION REQUEST TO UNDERGROUND SERVICE ALERT (USA), PHONE NO. 1-800-422-4133, TWO WORKING DAYS BEFORE DIGGING. NO CONSTRUCTION PERMITS WILL BE ISSUED BY THE PUBLIC WORKS DEPARTMENT INVOLVING EXCAVATION FOR UNDERGROUND FACILITIES UNLESS THE APPLICANT HAS BEEN PROVIDED AN INQUIRY IDENTIFICATION NUMBER BY U.S.A.
 12. NO FINISHED FLOOR ELEVATION SHALL BE LESS THAN 4' ABOVE THE SEWER FLOW LINE AT POINT OF CONNECTION WITHOUT HAVING A PROPER BACKWATER VALVE INSTALLED IN THE LATERAL.
 13. ALL FLAGGED ELEVATIONS SHALL BE STAKED IN THE FIELD BY THE PRIVATE ENGINEER.
 14. THE PRIVATE ENGINEER PREPARING THESE PLANS SHALL BE RESPONSIBLE FOR PRESERVING OR RE-ESTABLISHING AND REFERENCING SURVEY MONUMENTS DESTROYED, DISTURBED OR BURIED AS A RESULT OF CONSTRUCTION SHOWN HEREON.

- GENERAL NOTES:**
1. The private engineer signing these plans is responsible for the accuracy and acceptability of the work hereon. In the event of discrepancies arising during construction, the private engineer shall be responsible for determining an acceptable solution and revising the plans for approval by the City.
 2. Construction shall be in accordance with the Standard Specifications for Public Works Construction, 1992 Edition and City of Riverside Standard Drawings.
 3. It shall be the responsibility of the contractor to clear the right of way in accordance with the provisions of law as it affects each utility including irrigation lines and appurtenances and at no cost to the City.
 4. Pipe shall be bedded per Case I, Standard Drawing No. 452, unless otherwise specified on plans.
 5. Location of Wyes and laterals to be determined at the direction of the owner.
 6. All stubs and laterals to be constructed in accordance with Standard Drawing No. 562. Stubs shall be plugged and capped.
 7. Manhole frames and covers to be adjusted to grade by Sewer Contractor after final paving of streets.
 8. Laterals are to be 4" V.C.R. and extended to property line.
 9. Plugs shall be installed and will remain in place where new sewer connects with the existing sewer until such time as the new sewer is accepted by the City.
 10. Prior to construction of sewer, Contractor is to expose the existing sewer and contact the Engineer for verification of existing location and elevation.

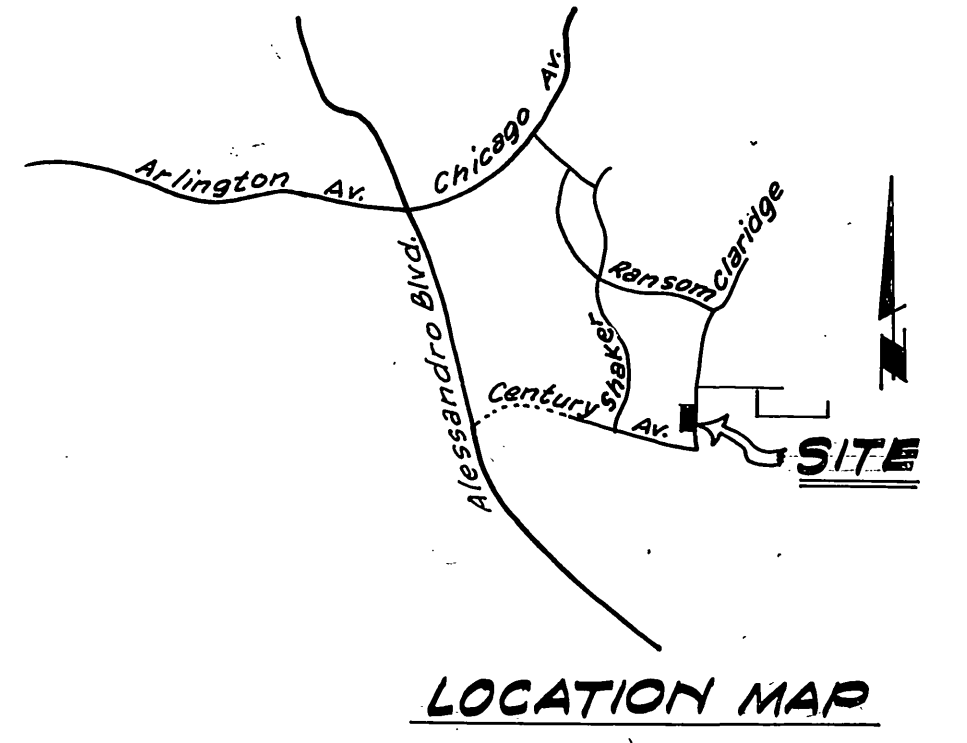

NOTICE TO CONTRACTORS:

The existence and location of underground utility pipes or structures shown on these plans are obtained by a search of the available records. To the best of our knowledge there are no existing utilities except as shown on these plans. The Contractor is required to take due precautionary measures to protect the utility lines not of record or not shown on these plans.

BENCH MARK:
 Chisled "B" 1' north of Tract boundary of Tract No. 5137 on west curb of Claridge Dr. Elev. 1398.91, per Plan 5-819, R-1460 and R-1724.
 * As built 6-12-87 TE

<p>CITY OF RIVERSIDE DOMESTIC SYSTEM</p> <p>APPROVED BY: <i>Wesley Hylen</i> CHIEF UTILITIES ENGINEER, WATER DATE 9-13-77</p>	<p>ALBERT A. WEBB ASSOCIATES CIVIL ENGINEERS RIVERSIDE, CALIFORNIA</p> <p>APPROVED BY: <i>Albert Webb</i> DATE 9/31/77 R.E. No. 9272</p>	<p>CITY OF RIVERSIDE, CALIFORNIA PUBLIC WORKS DEPARTMENT</p> <p>APPROVED BY: _____ BY DATE _____ PRINCIPAL ENGINEER _____ PARK DEPARTMENT _____ TRAFFIC DIVISION _____ CHIEF PUB. WKS. ENGR. _____ DATE 9/29/77</p>	<p>SEWER PLAN & PROFILE PARCEL MAP NO. 9445 CLARIDGE DRIVE</p> <p>ACCOUNT No. 77-53 DRAWING NUMBER 9-1184 SHEET 1 OF 1 FILE NO. 77-53-B</p>
<p>W. O. 77-93 FOR 1977 BENCHMARKED F.S.</p>		<p>DESIGNED BY: <i>W.P.</i> DRAWN BY: <i>R.W.H.</i> CHECKED BY: _____</p>	