


BM. Elev. = 861.589  
5 ft. in South headwall of Canal  
Culvert, Indiana & Arlington.

SCALE Horiz. 1"=50'  
Vert. 1"=5'

F.B. 487-22-31

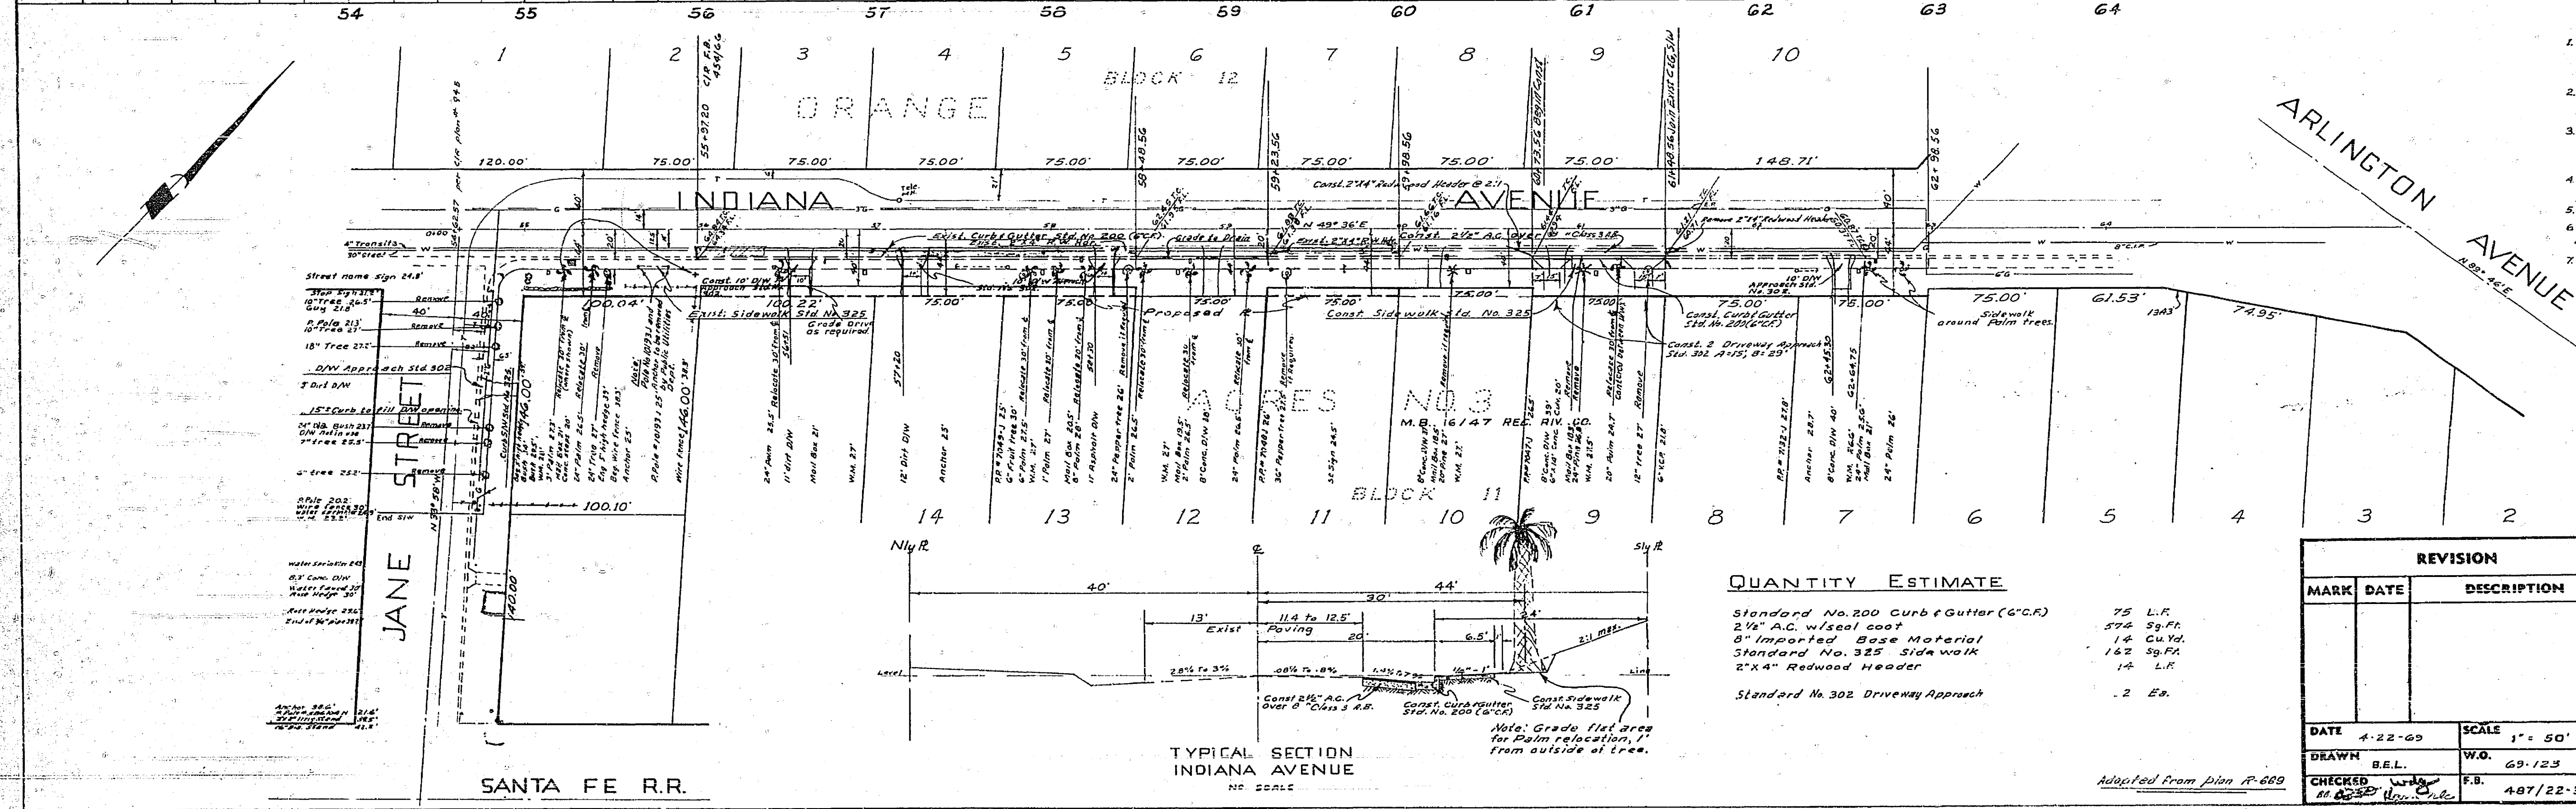

- GENERAL NOTES**
- It shall be the responsibility of the Contractor to clear the right of way in accordance with the provisions of law as it affects each utility including irrigation lines and appurtenances and at no cost to City.
  - Construction shall be in accordance with the City of Riverside, Department of Public Works Specifications No. 261 and Standard Drawings.
  - Prime coat and paint blinder are required.
  - Trim edge of existing paving to clean, straight line. Construct matchup paving to produce a smooth section.
  - Relocate mail boxes as directed in the field.
  - Grade through areas not to be improved to provide drainage as directed by the Engineer.
  - Trees to be removed or relocated as shown.

**QUANTITY ESTIMATE**

Standard No. 200 Curb & Gutter (C.C.R)	75 L.F.
2 1/2" A.C. w/ seal coat	574 Sq.Ft.
8" Imported Base Material	14 Cu.Yd.
Standard No. 325 Sidewalk	162 Sq.Ft.
2" X 4" Redwood Header	14 L.F.
Standard No. 302 Driveway Approach	2 Ea.

APPROVED BY: *[Signature]*  
MARK T. RECREATION DIRECTOR  
DATE: 5-1-69

ALBERT A. WEBB ASSOCIATES  
CIVIL ENGINEERS - RIVERSIDE, CALIFORNIA  
APPROVED: *[Signature]* DATE: 4/22/69  
11 2876

**CITY OF RIVERSIDE, CALIFORNIA  
DEPARTMENT OF PUBLIC WORKS**

R-36-612  
**STREET PLAN & PROFILE**

**INDIANA AVENUE  
JANE STREET  
TO  
ARLINGTON AVENUE**

DATE: 4-22-69 SCALE: 1"=50'  
DRAWN: B.E.L. W.O.: 69-123  
CHECKED: *[Signature]* F.B.: 487/22-31

APPROVED BY: *[Signature]*  
DIRECTOR OF PUBLIC WORKS  
NO. R-1350  
DATE: 5-21-69 SHEET 1 OF 1

**PROFILE**

DATE: 5-1-69

**PLAN**

DATE: 5-1-69