
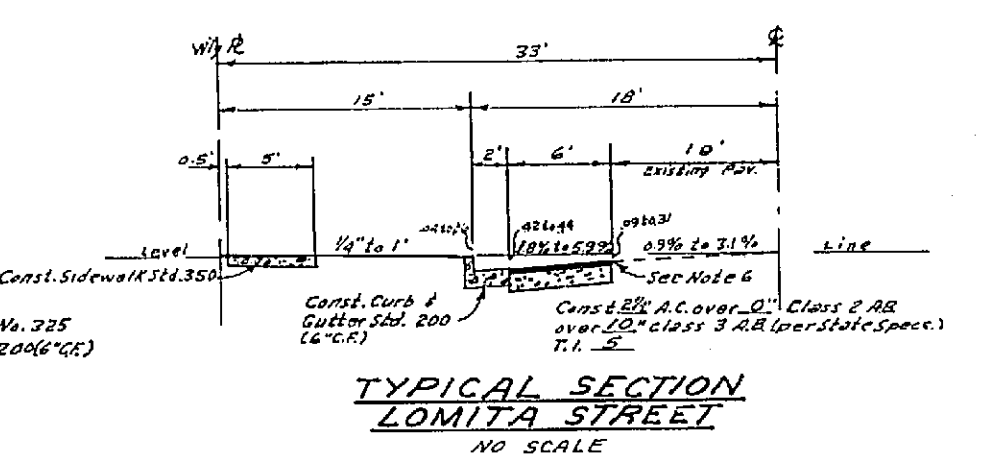


LIGHTING NOTES

Indicates Feed Point
 Indicates Light Standard City of Riverside Std. No. 45 (41) Meritlite
 Indicates 35,000 Lumen M.C. luminaires to be installed on a 50' x 50' grid
 by the City of Riverside, California
 Indicates 1" conduit (High Voltage)
 Light Standards and Pole Spacing to be located on the right side of the street
 Light Standards shall be spaced 50' on center
 Pole Spacing shall be 50' on center
 All wiring shall be in accordance with the City of Riverside Light Dept. Street Lighting Spec.
 S.W. can be installed on the right side of the street
 All wiring shall be in accordance with the City of Riverside Light Dept. Street Lighting Spec.
 All wiring shall be in accordance with the City of Riverside Light Dept. Street Lighting Spec.
 All wiring shall be in accordance with the City of Riverside Light Dept. Street Lighting Spec.
 All wiring shall be in accordance with the City of Riverside Light Dept. Street Lighting Spec.

\$25.00 - Connect Fee Paid 3-31-65
 \$250.00 - M.V. on Wood Pole Paid 3-31-65

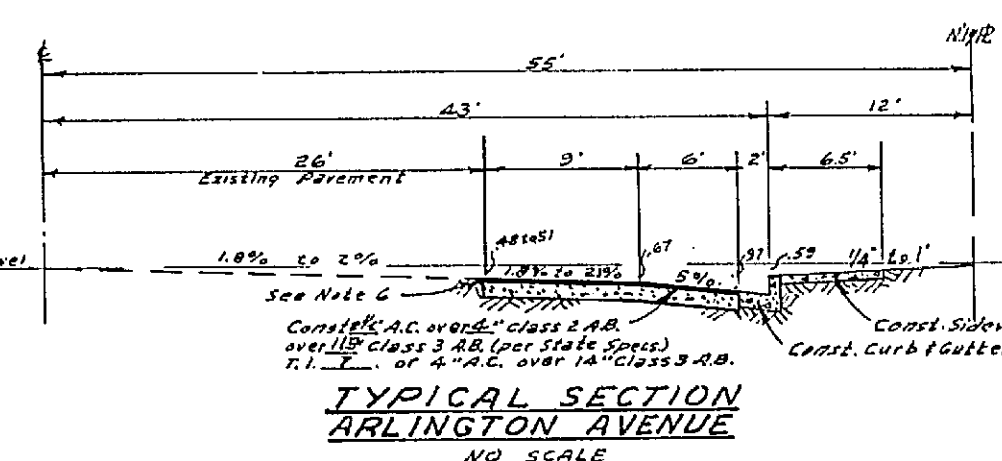

APPROVED BY: *[Signature]* DATE: 3-31-65
 ALBERT A. WEBB ASSOCIATES
 CIVIL ENGINEERS
 RIVERSIDE, CALIFORNIA
 APPROVED BY: *[Signature]* DATE: 7/6/65
 R.E. No. 2876
 W.O.G.S.-22 FOR: BERNARD W. BECKER F.B. 524

REVISIONS	DATE	BY	REASON
1	11-16-72	ALB	REVISIONS
2	11-16-72	ALB	REVISIONS
3	11-16-72	ALB	REVISIONS
4	11-16-72	ALB	REVISIONS
5	11-16-72	ALB	REVISIONS
6	11-16-72	ALB	REVISIONS
7	11-16-72	ALB	REVISIONS
8	11-16-72	ALB	REVISIONS
9	11-16-72	ALB	REVISIONS
10	11-16-72	ALB	REVISIONS

CITY OF RIVERSIDE, CALIFORNIA
 DEPARTMENT OF PUBLIC WORKS
 APPROVED BY: *[Signature]* DATE: 4-2-65
 OFFICE ENGINEER: *[Signature]*
 TRAFFIC DIVISION: *[Signature]*
 ASSISTANT CITY ENGINEER: *[Signature]*
 DATE: 4-2-65

STREET PLAN & PROFILE
 ARLINGTON AVENUE
 AND
 LOMITA STREET
 ZONING CASE NO. R-49-645
 PROJECT NO. 247
 R-1019
 45-13032
 SHEET 1 OF 1
 FILE NO. 65-22-A
 HORIZ. SCALE: 1" = 20' VERT. SCALE: 1" = 5'

QUANTITY ESTIMATE

Curb & Gutter Std. No. 200 (6" C)	251 LF
"A.C. 1" Seal Coat	4,112 SF
Temporary Sand Material	CK
Sidewalk Std. No. 325	210 SF
Sidewalk Std. No. 350	1,105 SF
2"x4" R.W. Header	60 LF
Cross Gutter Std. No. 221	454 SF
W-21-R	3 SF
Pavement Removal	4,600 SF
Driveway Approach Std. 302	898 SF

BENCH MARK:
 174.75 ± 0.00, ELEV. 751.66 "M" nail in rear of center curb at Airport Drive

(1) The finished sub grade shall have a connection of not less than 30% for a depth of 65 feet as determined by test method No. "CUT" 216" immediately prior to placement of the curb.
 (2) Construction shall be in accordance with the Standard Specifications for Highway Construction, 1962 Edition, Section 201-1.1.