

PARK SIERRA DR. BETWEEN MAGNOLIA AVE. AND DIANA ST

#	STREET NAME	STREET LIMIT	STREET LIMIT	STREET LENGTH (LF)	0.1" ARHM-GG OVERLAY (TON)	AC REMOVAL (SF)	AC REPLACE (TON)	COLD MILLING TYPE I W=5' LF	COLD MILLING TYPE I W=10' LF	R&R CURB & GUTTER (LF)	R&R SIDEWALK (SF)	R&R WCR (EA)	R&R WM BOX & COVER (EA)	BLUE REFLECTIVE MARKER (EA)	ADJUST SEWER & SD MH (EA)	ADJUST WATER GATE VALVE (EA)	R/R X-GUTTER (SF)	REPLACE TRAFFIC LOOPS (EA)
	Park Sierra Dr	Magnolia Ave	Diana St	1,740	540	12,420	470	2,640	250*	0	1,350	13	1	12	7	15	260	8


*Includes the extra header cut and type-1 cold milling

CONSTRUCTION NOTES:

- NUMBERS ABOVE 100 IN A HEXAGON ON THE PLAN REFER TO THE RESPECTIVE STANDARD DRAWING AND SHALL BE CONSTRUCTED ACCORDINGLY. UNLESS MODIFICATIONS ARE NOTED ON THE PLAN OR COVER SHEET. ANY NUMBER SHOWN BELOW THE STANDARD DRAWING NUMBER INDICATES THE SPECIFIC ALTERNATE TO BE CONSTRUCTED.
- R/R REMOVE AND REPLACE EXISTING IMPROVEMENTS AS INDICATED ON THE PLANS.
- 325 REMOVE AND REPLACE EXISTING PCC SIDEWALK PER CITY STANDARD DWG 325.
- 304 I CONSTRUCT PCC WHEELCHAIR RAMP PER CITY STANDARD DWG 304. TYPE AND LOCATION OF RAMP MAY CHANGE DURING CONSTRUCTION TO FIT SITE CONDITION AS DIRECTED BY THE ENGINEER.
- S1 REMOVE EXISTING DAMAGED AC PAVEMENT AND OR STRUCTURAL SECTION AND REPLACE WITH A MINIMUM OF 6" (DGAC) AC PAVEMENT OVER COMPACTED SOIL OR MATCH EXISTING STRUCTURAL SECTION, WHICHEVER IS GREATER.
- OL OVERLAY ENTIRE ROAD WIDTH WITH 0.10" OF ASPHALT RUBBER HOT MIX GAP GRADED.
- ADJ ADJUST SEWER, STORM DRAIN, ELECTRIC OR WATER MANHOLES, AND GATE VALVES TO GRADE. MANHOLES AND VALVES MAY REQUIRE SINGLE/DOUBLE ADJUSTMENTS OR RAMP UP DURING REMOVAL AND PAVING OPERATIONS.

SPECIFIC NOTES:

- 1 RAMP SHALL BE TYPE III EXCEPT OTHERWISE DETERMINED BY THE ENGINEER DURING CONSTRUCTION.
- 2 CONTRACTOR SHALL REPLACE STRIPING AND MARKINGS AFTER OVERLAY WORK IS COMPLETED.
- 3 CONCRETE SECTION TO BE REMOVED, THEN AREA SHALL BE GRADED, IRRIGATION SYSTEM ADJUSTED AND LANDSCAPED WITH SOD AFTER RAMP IS CONSTRUCTED.

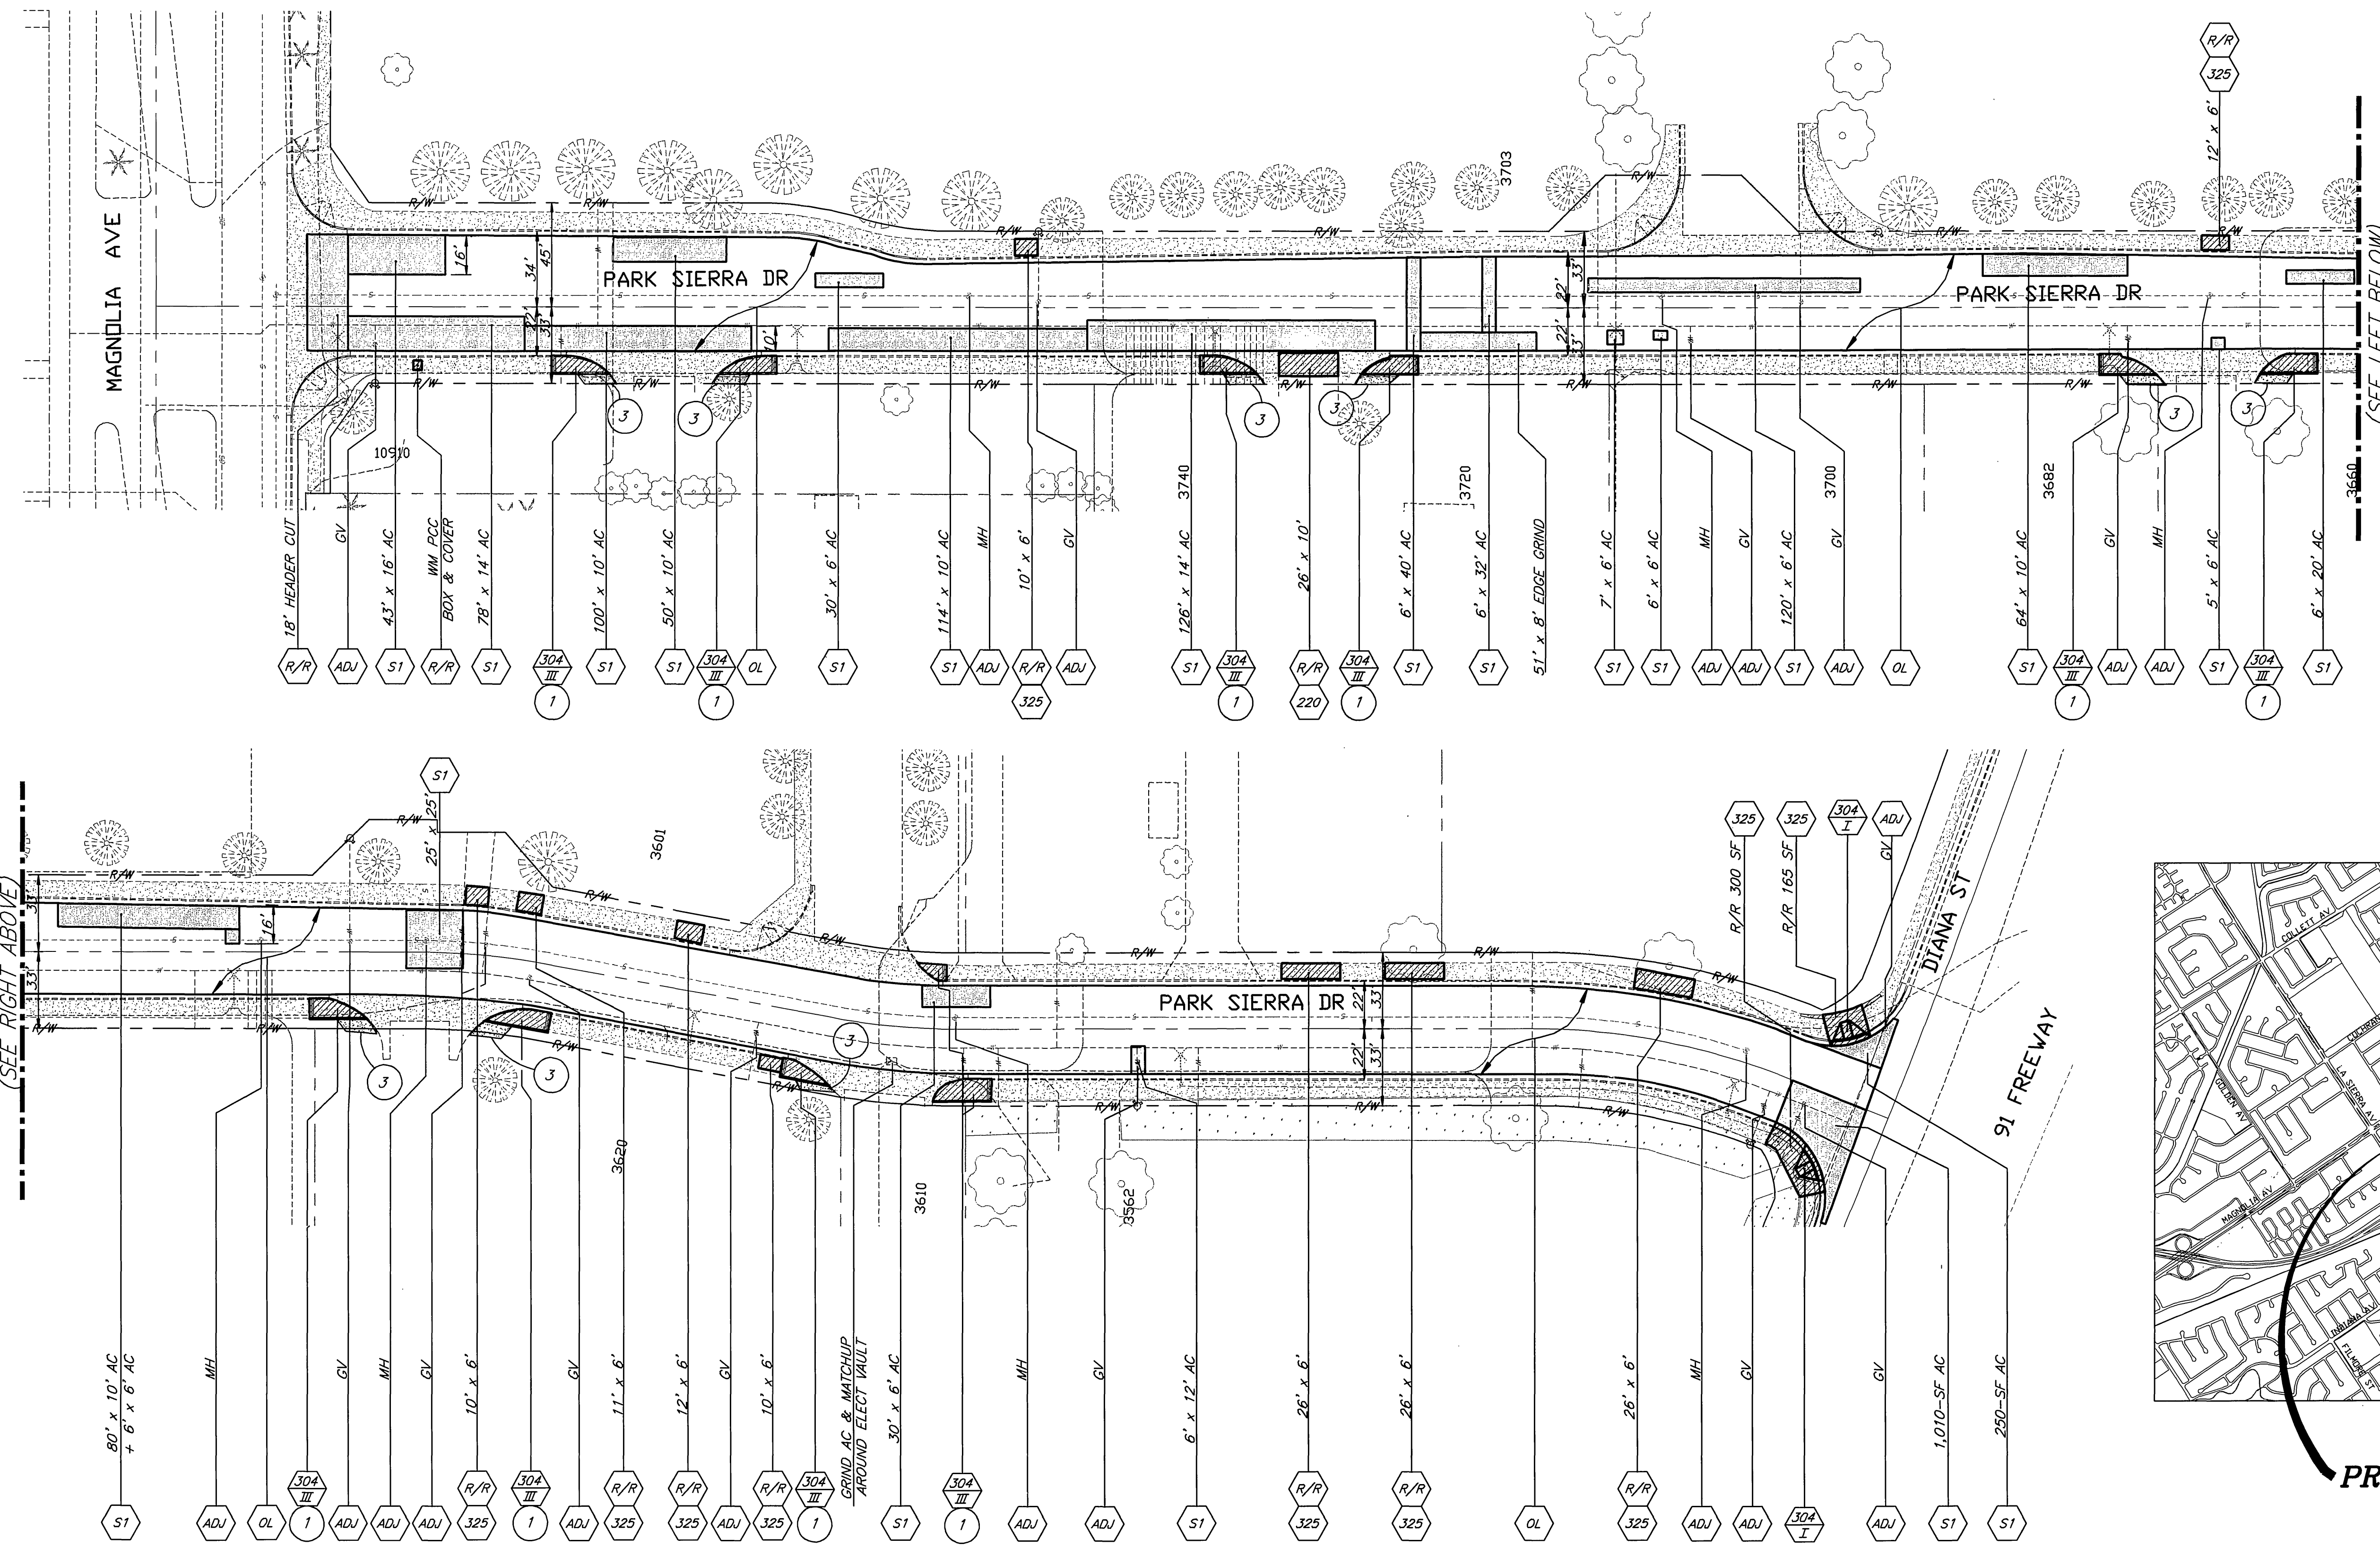

(SEE RIGHT ABOVE)

(SEE LEFT BELOW)



PROJECT LOCATION

Underground Service Alert
CALL BEFORE YOU DIG
CALL-TOLL FREE
1-800-227-2600
TWO WORKING DAYS BEFORE YOU DIG

ENGINEER IN RESPONSIBLE CHARGE
Ibrahim A. Massoud
IBRAHIM A. MASSOUD
R.C.E. No. 64224 expires 6/30/09
DATE 5/18/08

REGISTERED PROFESSIONAL ENGINEER
IBRAHIM A. MASSOUD
No. 64224
Exp. 6-30-2009
CIVIL
STATE OF CALIFORNIA

MARK	REVISIONS	APPR.	DATE

DESIGNED BY: JUE DRAWN BY: JUE CHECKED BY: APE

CITY OF RIVERSIDE, CALIFORNIA
PUBLIC WORKS DEPARTMENT

APPROVED BY:	BY:	DATE:	APPROVED BY:
ENGINEERING MANAGER	[Signature]	5/18/08	CITY ENGINEER
PRINCIPAL ENGINEER	[Signature]	5/18/08	
STREET SERVICES	[Signature]	5/18/08	
SUPERVISOR	[Signature]	5/18/08	
TRAFFIC DIVISION	[Signature]	5/18/08	
CONST. CONT. ADMN.	[Signature]	5/18/08	

DATE: 5/18/08

PARK SIERRA DR REHAB
(DIANA AVE TO MAGNOLIA AVE)

HORIZ. SCALE: 1" = 40'

ACCT. NO.: R-4093
SHEET 1 OF 1
FILE NO.