


RIVERSIDE

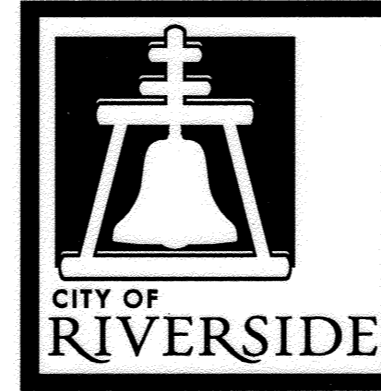

CALIFORNIA


PUBLIC WORKS DEPARTMENT 2014-2015 CDBG - WARD 7 STREET IMPROVEMENTS FOR SUNNYSLOPE AVENUE, EASY STREET, NEBRASKA AVENUE, BOGART AVENUE AND BUSHNELL AVENUE A HUD FUNDED PROJECT

GENERAL CONSTRUCTION NOTES:

1. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN TRAFFIC AS INDICATED IN THE ASSOCIATED PROJECT SPECIAL PROVISIONS.
2. CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE CITY OF RIVERSIDE STANDARD DRAWINGS AND STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 2012 EDITION.
3. EXISTING UTILITIES SHOWN ON THIS PLAN ARE PLOTTED FROM UTILITY RECORDS. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO LOCATE AND PROTECT ALL UTILITIES WHETHER OR NOT SHOWN ON THIS PLAN.
4. CONFLICTING UTILITIES SHOWN WITHIN CONSTRUCTION AREA WILL BE RELOCATED PRIOR TO CONSTRUCTION.
5. ALL STREET PULL BOXES, AFFECTED BY CONSTRUCTION, SHALL BE ADJUSTED TO THE PROPOSED GRADE.
6. PRIME CONTRACTOR BIDDING THIS WORK SHALL HAVE A CLASS "A" OR "C-8".
7. THE SEAM BETWEEN PASSES OF THE AC OVERLAY SHALL COINCIDE, AS CLOSE AS POSSIBLE, TO THE LANE LINES.
8. COLD MILLING SHALL BE AS DESCRIBED ON THE PLANS AND SPECIAL PROVISIONS OR AS DIRECTED BY THE ENGINEER.
9. ANY DISTRESSED EXISTING PAVEMENT SHALL BE REMOVED AND REPLACED AS DIRECTED BY THE ENGINEERING AFTER COLD-MILLING AND PRIOR TO PLACEMENT OF DGAC.
10. CONTRACTOR SHALL REMOVE ALL VEGETATION WITHIN ALL SIDEWALK PANELS WITHIN THE PROJECT LIMITS.
11. ALL EXISTING IMPROVEMENTS SHOWN HEREON SHALL BE PROTECTED IN PLACE UNLESS OTHERWISE NOTED.
12. EXISTING IRRIGATION SHALL BE PROTECTED OR MODIFIED AS NECESSARY TO CONSTRUCT NEW CONCRETE IMPROVEMENTS.
13. ALL FENCE POSTS SHALL BE PROTECTED OR MODIFIED AS NECESSARY IF POST FOUNDATION IS WITHIN A SIDEWALK PANEL THAT HAS BEEN CALLED OUT FOR REPLACEMENT.

CONSTRUCTION NOTES:

- NUMBERS ABOVE 100 IN A HEXAGON ON THE PLAN REFER TO THE RESPECTIVE STANDARD DRAWING AND SHALL BE CONSTRUCTED ACCORDINGLY. UNLESS MODIFICATIONS ARE NOTED ON THE PLAN OR COVER SHEET, ANY NUMBER SHOWN BELOW THE STANDARD DRAWING NUMBER INDICATES THE SPECIFIC ALTERNATE TO BE CONSTRUCTED.
- ADJUST TO GRADE, DESCRIPTION PER PLAN. (MH) SEWER OR STORM DRAIN. (GV) GATE VALVE. (ETS) ELECTRIC TEST STATION
- PROVIDE VARIABLE DEPTH COLDMILLING TO TRANSITION FROM 0.15' AT GUTTER LIP/JOINT TO 0' DEPTH AT THE MILL WIDTH INDICATED. (XX) = WIDTH OF LINEAR COLD MILL AS INDICATED ON PLANS.
- COLD MILL EXISTING AC PAVEMENT. (DEPTH = 0.15').
- OVERLAY EXISTING PAVEMENT WITH 0.15' DGAC PAVEMENT.
- CONTRACTOR SHALL MATCH EXISTING AC DRIVEWAYS AND RECONSTRUCT EXISTING AC FLOWLINE, BERM AND/OR WALKWAY AS NEEDED AND DIRECTED IN FIELD BY ENGINEER.

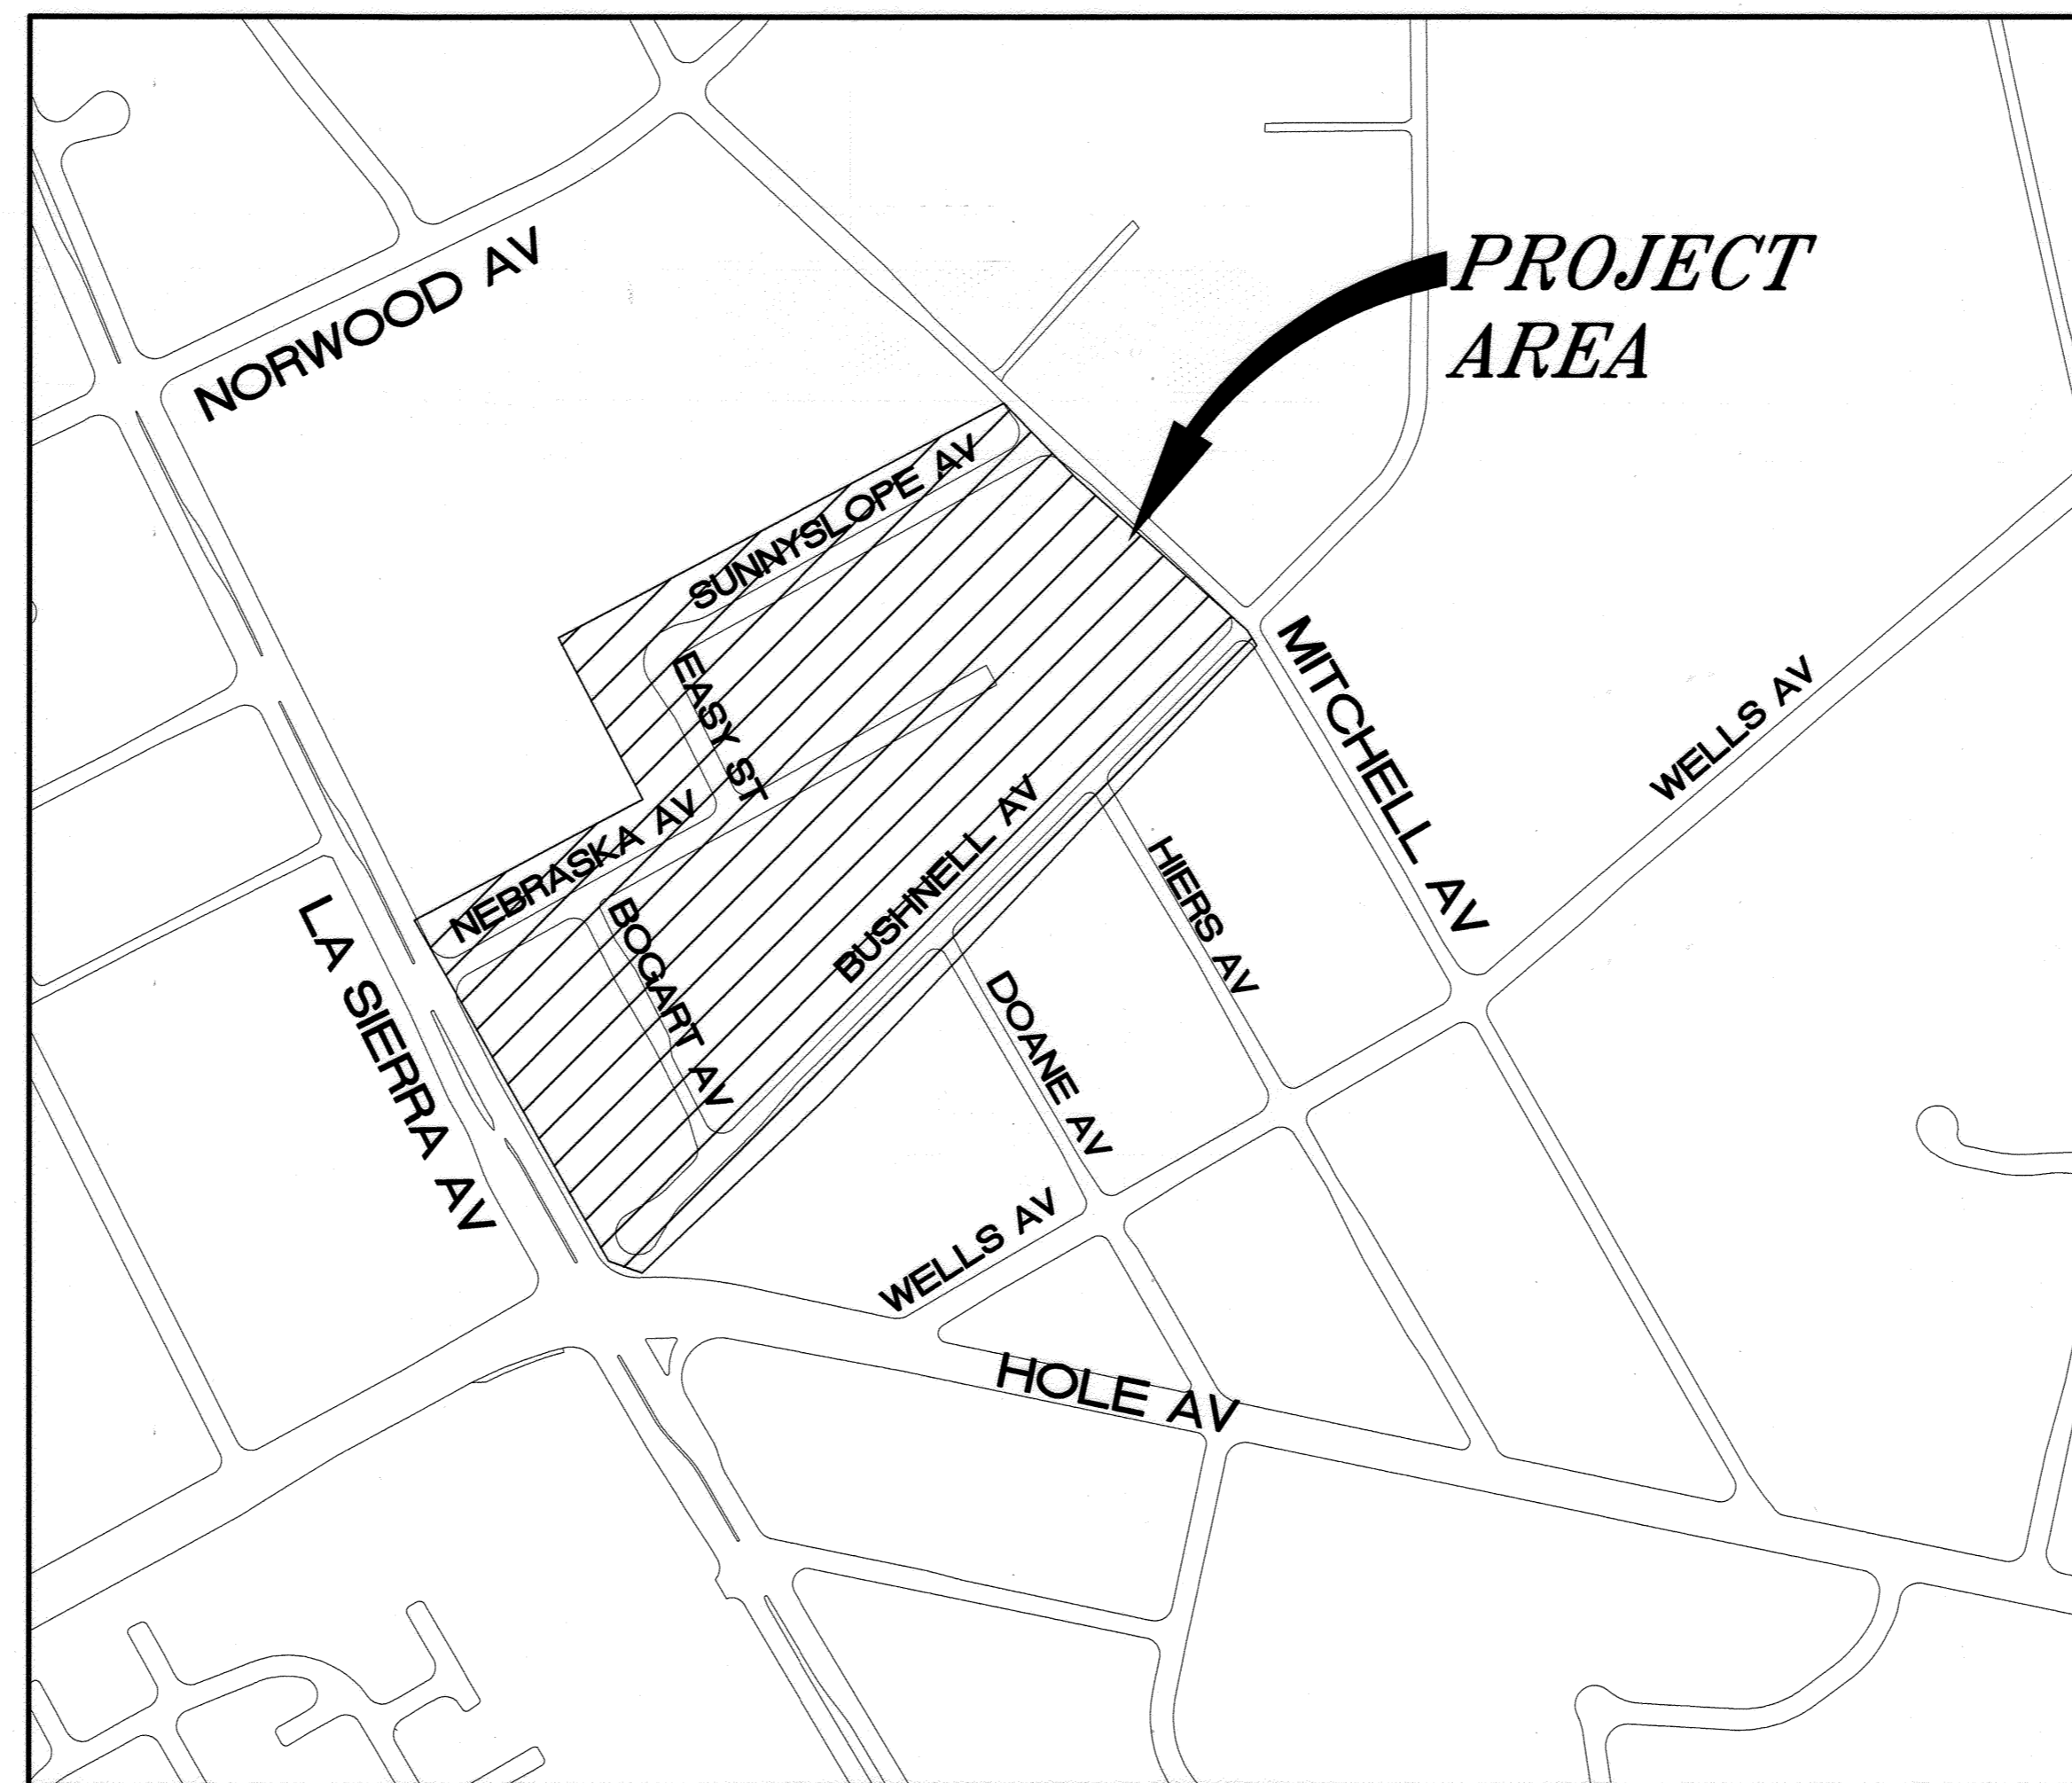

LOCATION MAP

NTS

EXISTING TOPOGRAPHY:

- SANITARY SEWER M.H.
- STORM DRAIN M.H.
- ELECTRIC M.H.
- WATER M.H.
- GATE VALVE
- ELECTRICAL TEST STATION (GAS)
- FIRE HYDRANT




LEGEND:

- CM1 + OL
- PROPOSED PCC
- CM2 + OL


SHEET INDEX: STREET IMPROVEMENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	MAINTENANCE PLAN

	ENGINEER IN RESPONSIBLE CHARGE Christopher P. Scully R.C.E. No. 83144 EXPIRES: 3-31-17 DATE: 9-16-15		CITY OF RIVERSIDE, CALIFORNIA DEPARTMENT OF PUBLIC WORKS	STREET IMPROVEMENTS 2014-2015 CDBG - WARD 7 STREET IMPROVEMENTS FOR SUNNYSLOPE AVENUE, EASY STREET, NEBRASKA AVENUE, BOGART AVENUE AND BUSHNELL AVENUE TITLE SHEET	DESIGN WORK ORDER NO.: 1520063 CONSTR. WORK ORDER NO.: 1604752 R-4343 SHEET <u>1</u> OF <u>2</u> FILE NAME: R4342-1.DWG
	DESIGNED BY: CS DRAWN BY: DC/CS CHECKED BY: CS	APPROVED BY: CITY ENGINEER DATE: 9/23/2015	APPROVED BY: CITY ENGINEER DATE: 9/23/2015	TRAFFIC DIVISION: STREETS SERVICES: SURVEYOR:	HORIZ. SCALE: N/A VERT. SCALE: N/A

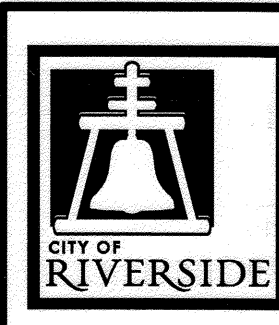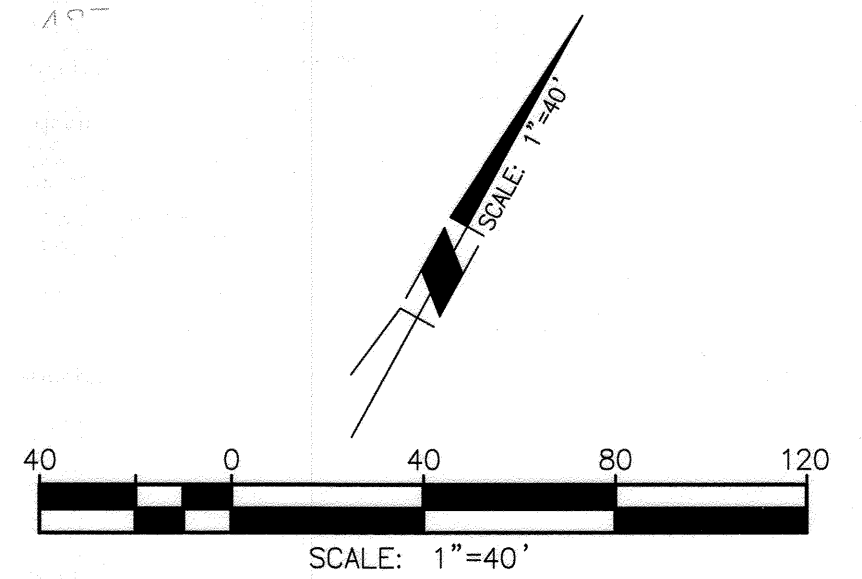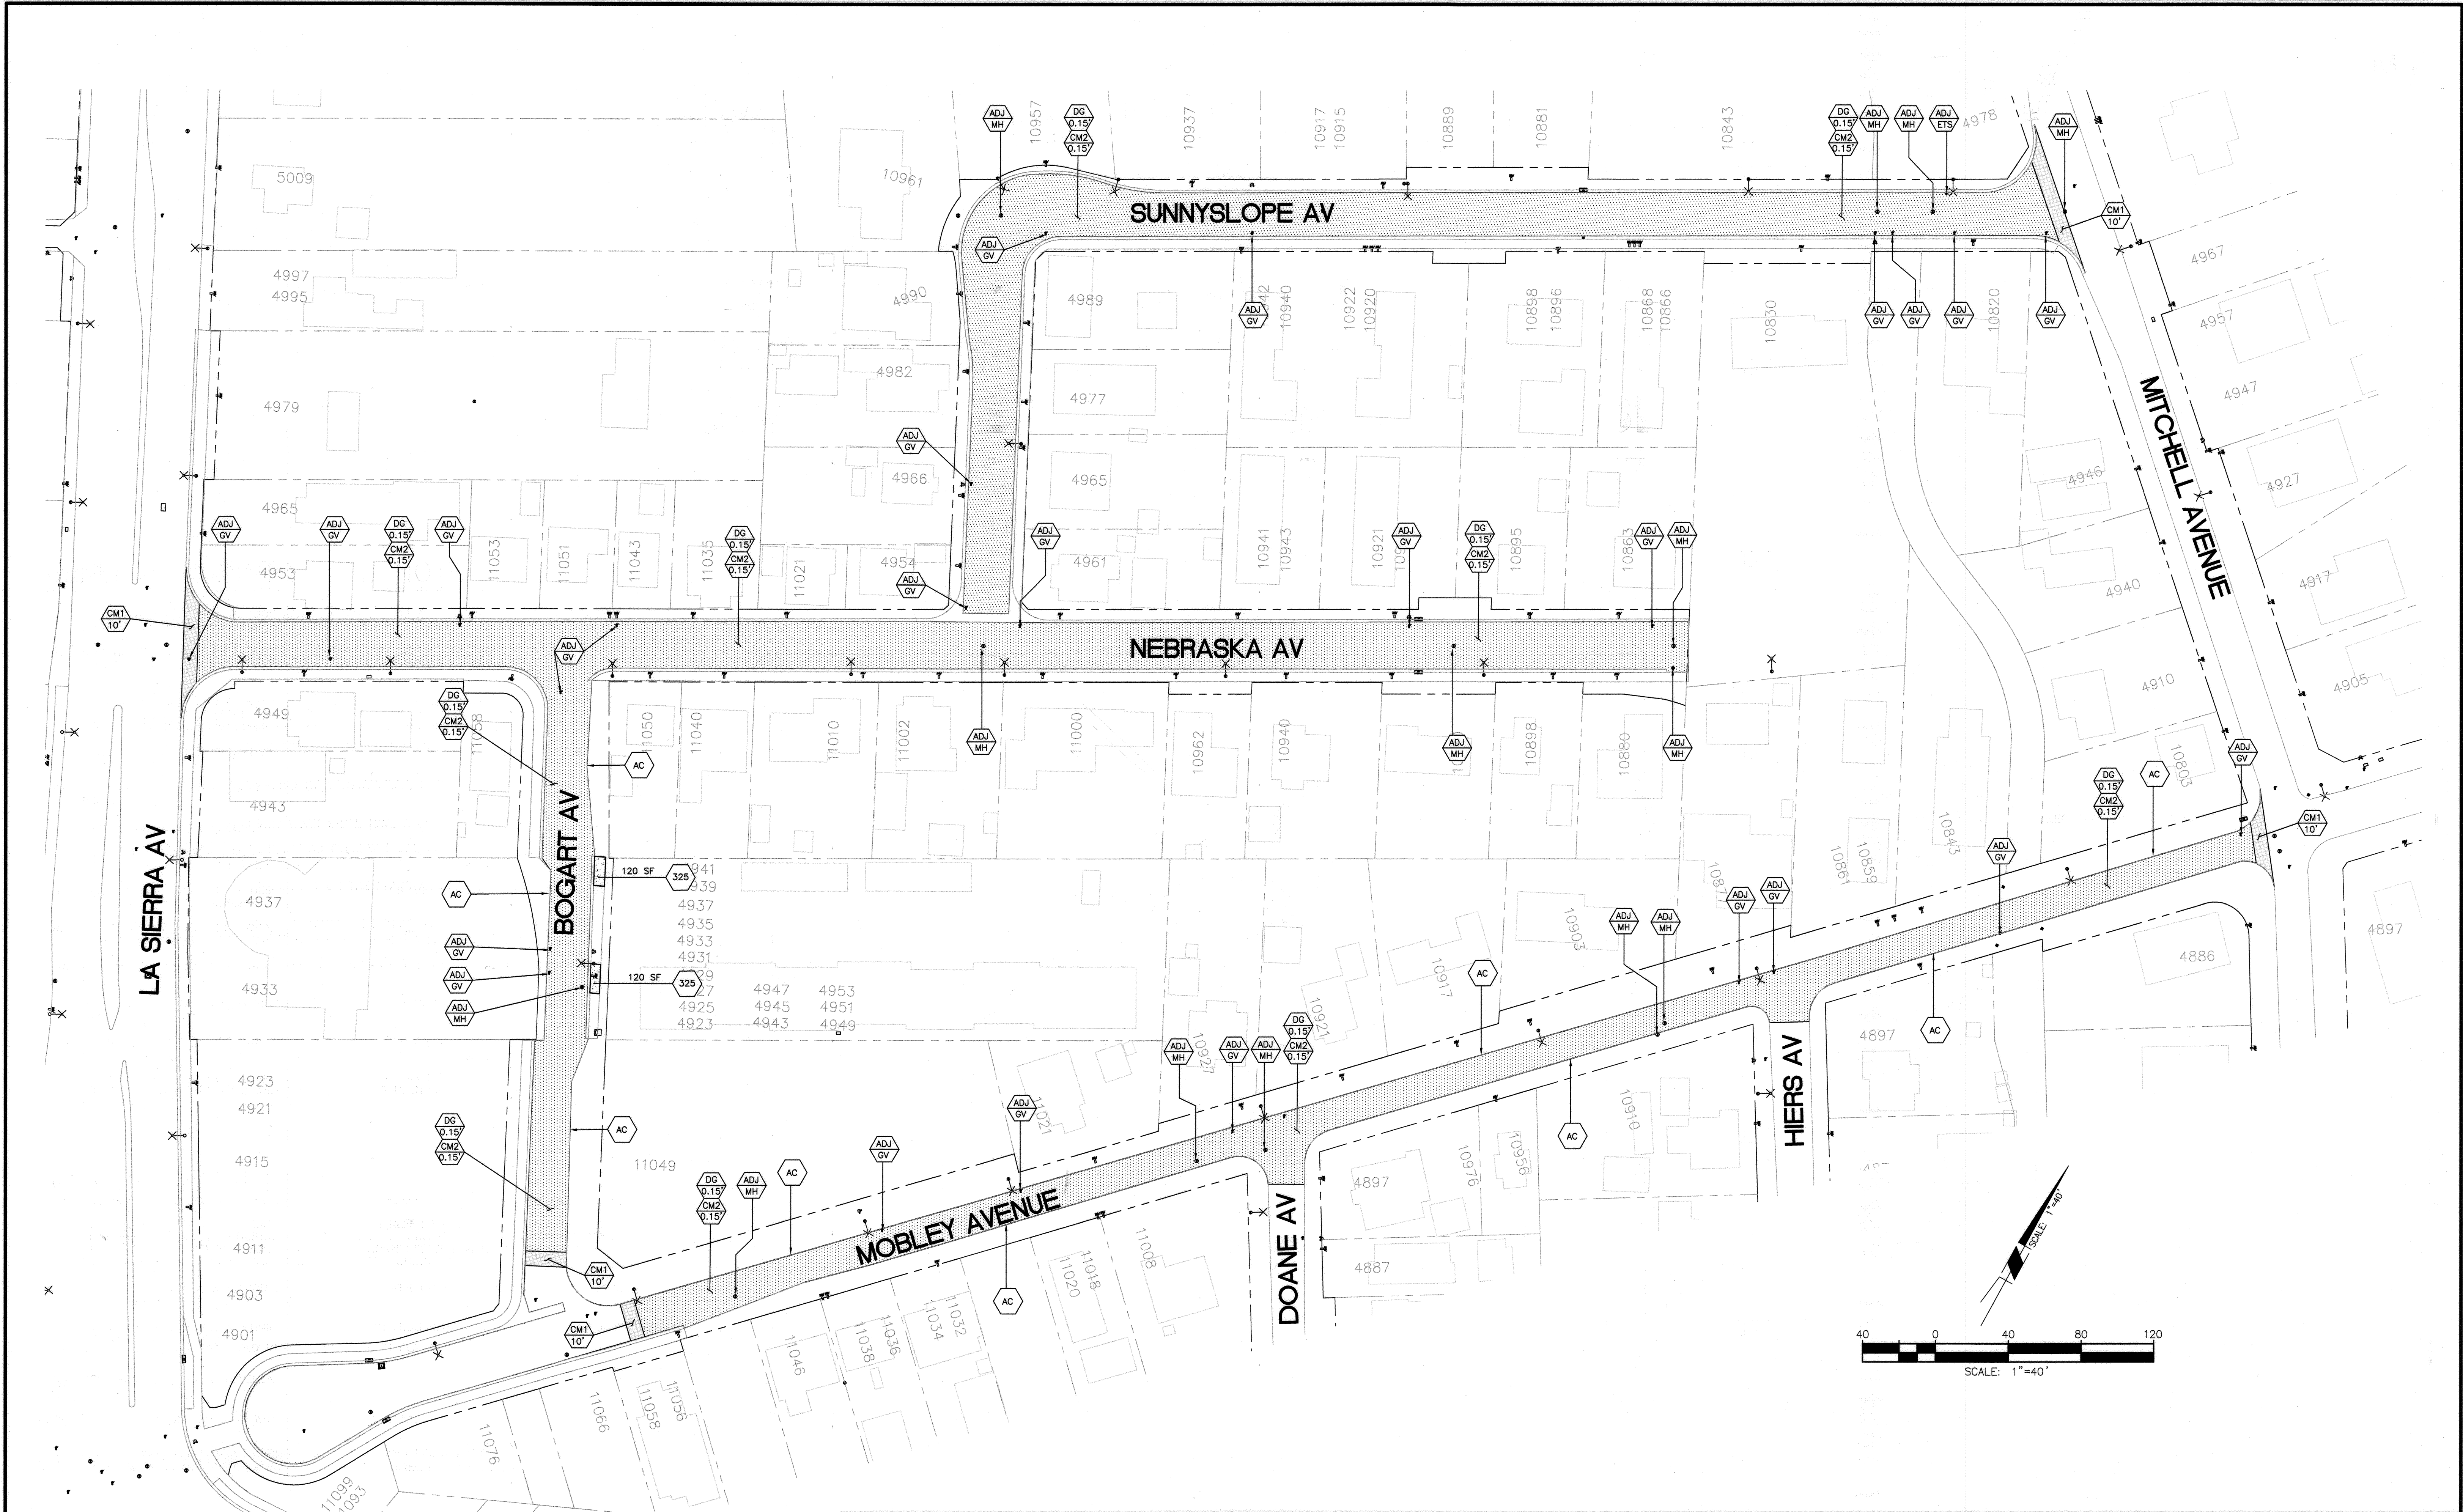

ENGINEER IN RESPONSIBLE CHARGE
Christopher P. Scully
 Christopher P. Scully
 R.C.E. No. 83144 EXPIRES: 3-31-17
 DATE: 9-16-15

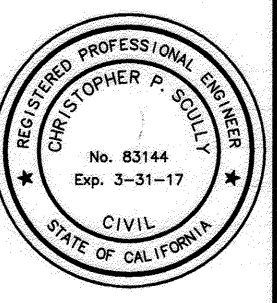

MARK	REVISIONS	APPR.	DATE

CITY OF RIVERSIDE, CALIFORNIA DEPARTMENT OF PUBLIC WORKS			
APPROVED BY	BY	DATE	APPROVED BY
ENGINEERING MANAGER	<i>FM</i>	9/17/15	<i>Christopher P. Scully</i>
CONSTRUCTION ADMIN.	<i>DC</i>	9-18-15	CITY ENGINEER
TRAFFIC DIVISION	<i>E.H</i>	9-15-15	DATE: 9/23/2015
STREETS SERVICES	<i>o</i>	9/23/15	
SURVEYOR			

STREET IMPROVEMENTS	
2014-2015 CDBG - WARD 7	
STREET IMPROVEMENTS FOR SUNNYSLOPE AVENUE, EASY STREET, NEBRASKA AVENUE, BOGART AVENUE AND BUSHNELL AVENUE	
MAINTENANCE PLAN	
HORIZ. SCALE: 1"=50'	VERT. SCALE: N/A

DESIGN WORK ORDER NO.: 1520063
 CONSTR. WORK ORDER NO.: 1804752
R-4343
 SHEET **2** OF **2**
 FILE NAME: R4343-2.DWG