
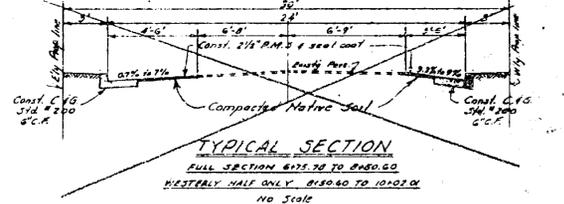


NO.	ANGLE	CHORD	ARC LENGTH	CHORD BEARING
1	96°53'30"	11.22	16.85	10
2	93°24'30"	8.92	16.52	10
3	89°53'	10.00	15.71	10
4	90°21'	10.00	15.71	10
5	89°58'	9.99	15.70	10

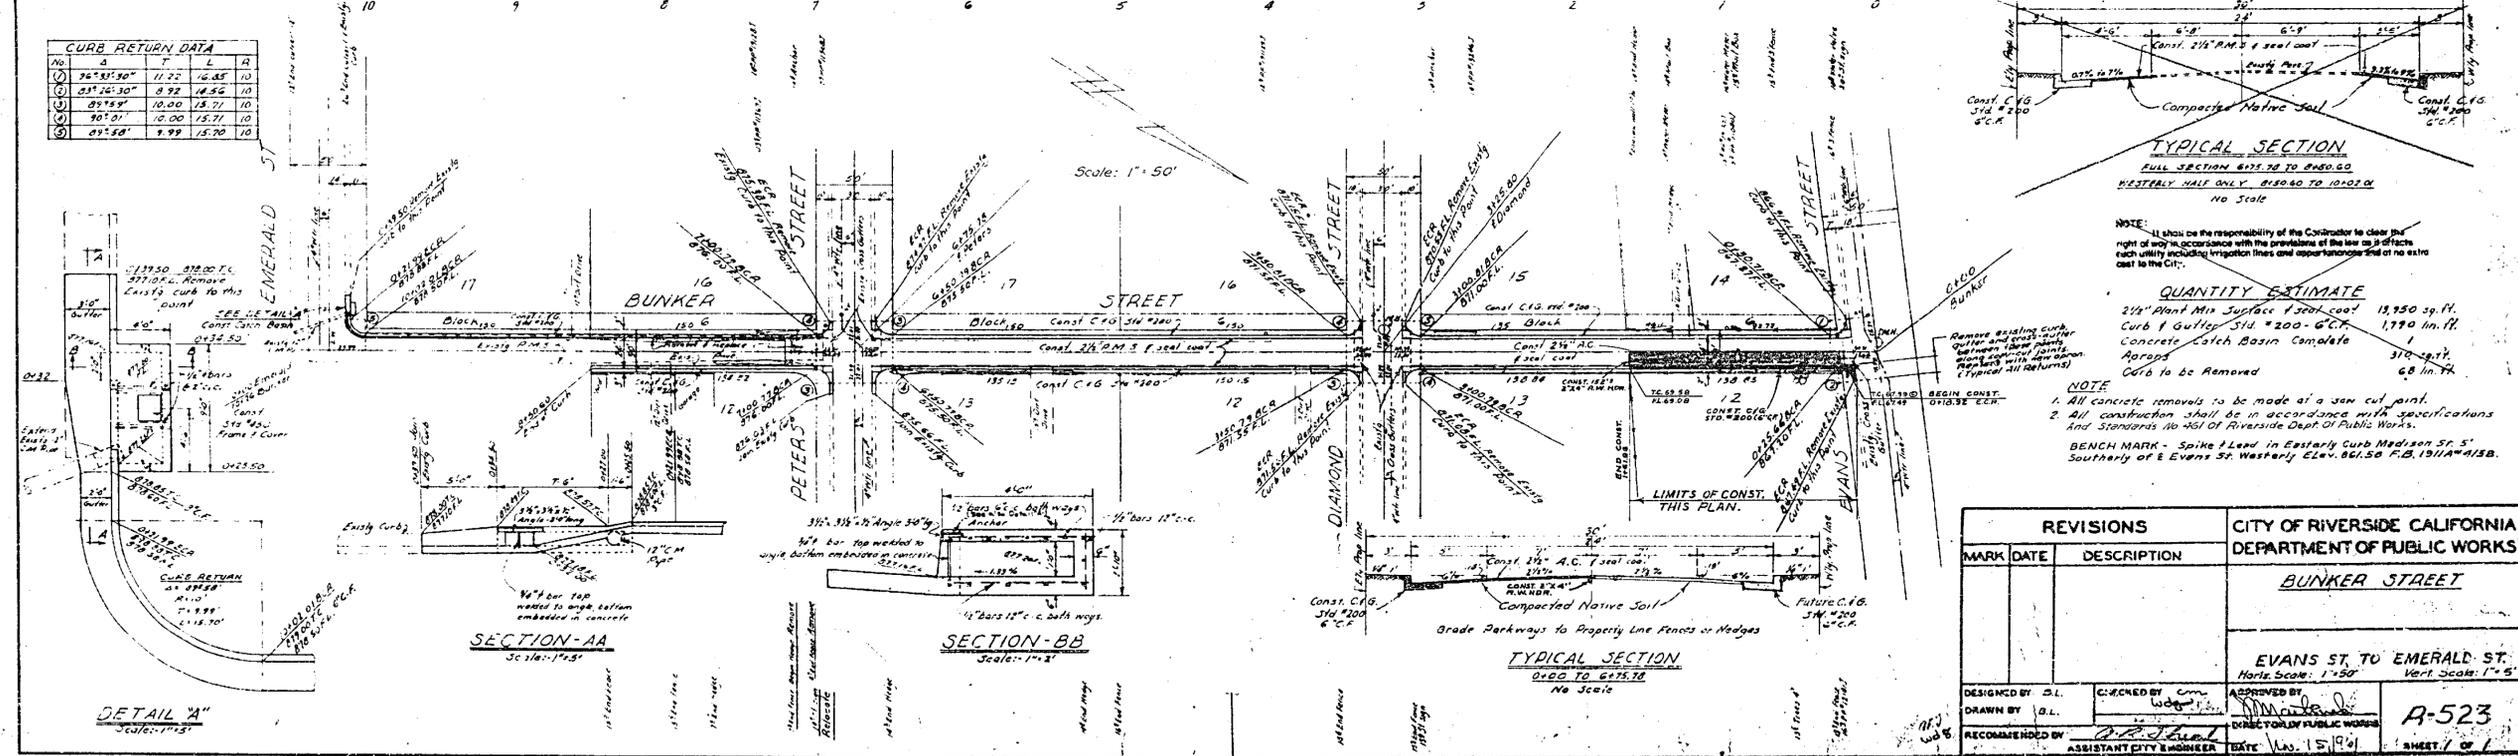

NOTE: It shall be the responsibility of the Contractor to clear the right of way in accordance with the provisions of the law as to effects each utility including irrigation lines and other structures and to set out to the City.

QUANTITY ESTIMATE

2 1/4" Plant Mix Surface 1 seal coat	19,950 sq. ft.
Curb & Gutter 314" x 200" G.C.P.	1,790 lin. ft.
Concrete Catch Basins Concrete	1
Aprons	370 sq. ft.
Curb to be Removed	68 lin. ft.

NOTE:
 1. All concrete removals to be made at a saw cut joint.
 2. All construction shall be in accordance with specifications and standards of the City of Riverside, Dept. of Public Works.

BENCH MARK - Spike & Lead in Eastern Curb Madison St. 5' South of E. Evans St. West of E. 861.50 F.B. 1911A/415B.

REVISIONS		CITY OF RIVERSIDE CALIFORNIA DEPARTMENT OF PUBLIC WORKS
MARK	DATE	
		BUNKER STREET
		EVANS ST. TO EMERALD ST. Horizontal Scale: 1"=50' Vertical Scale: 1"=5'
DESIGNED BY	CHECKED BY	APPROVED BY
DRAWN BY		
RECOMMENDED BY		

PROFILE
 DATE: 11/15/90
 DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]

PLAN
 DATE: 11/15/90
 DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]

A-523
 SHEET 1 OF 1