
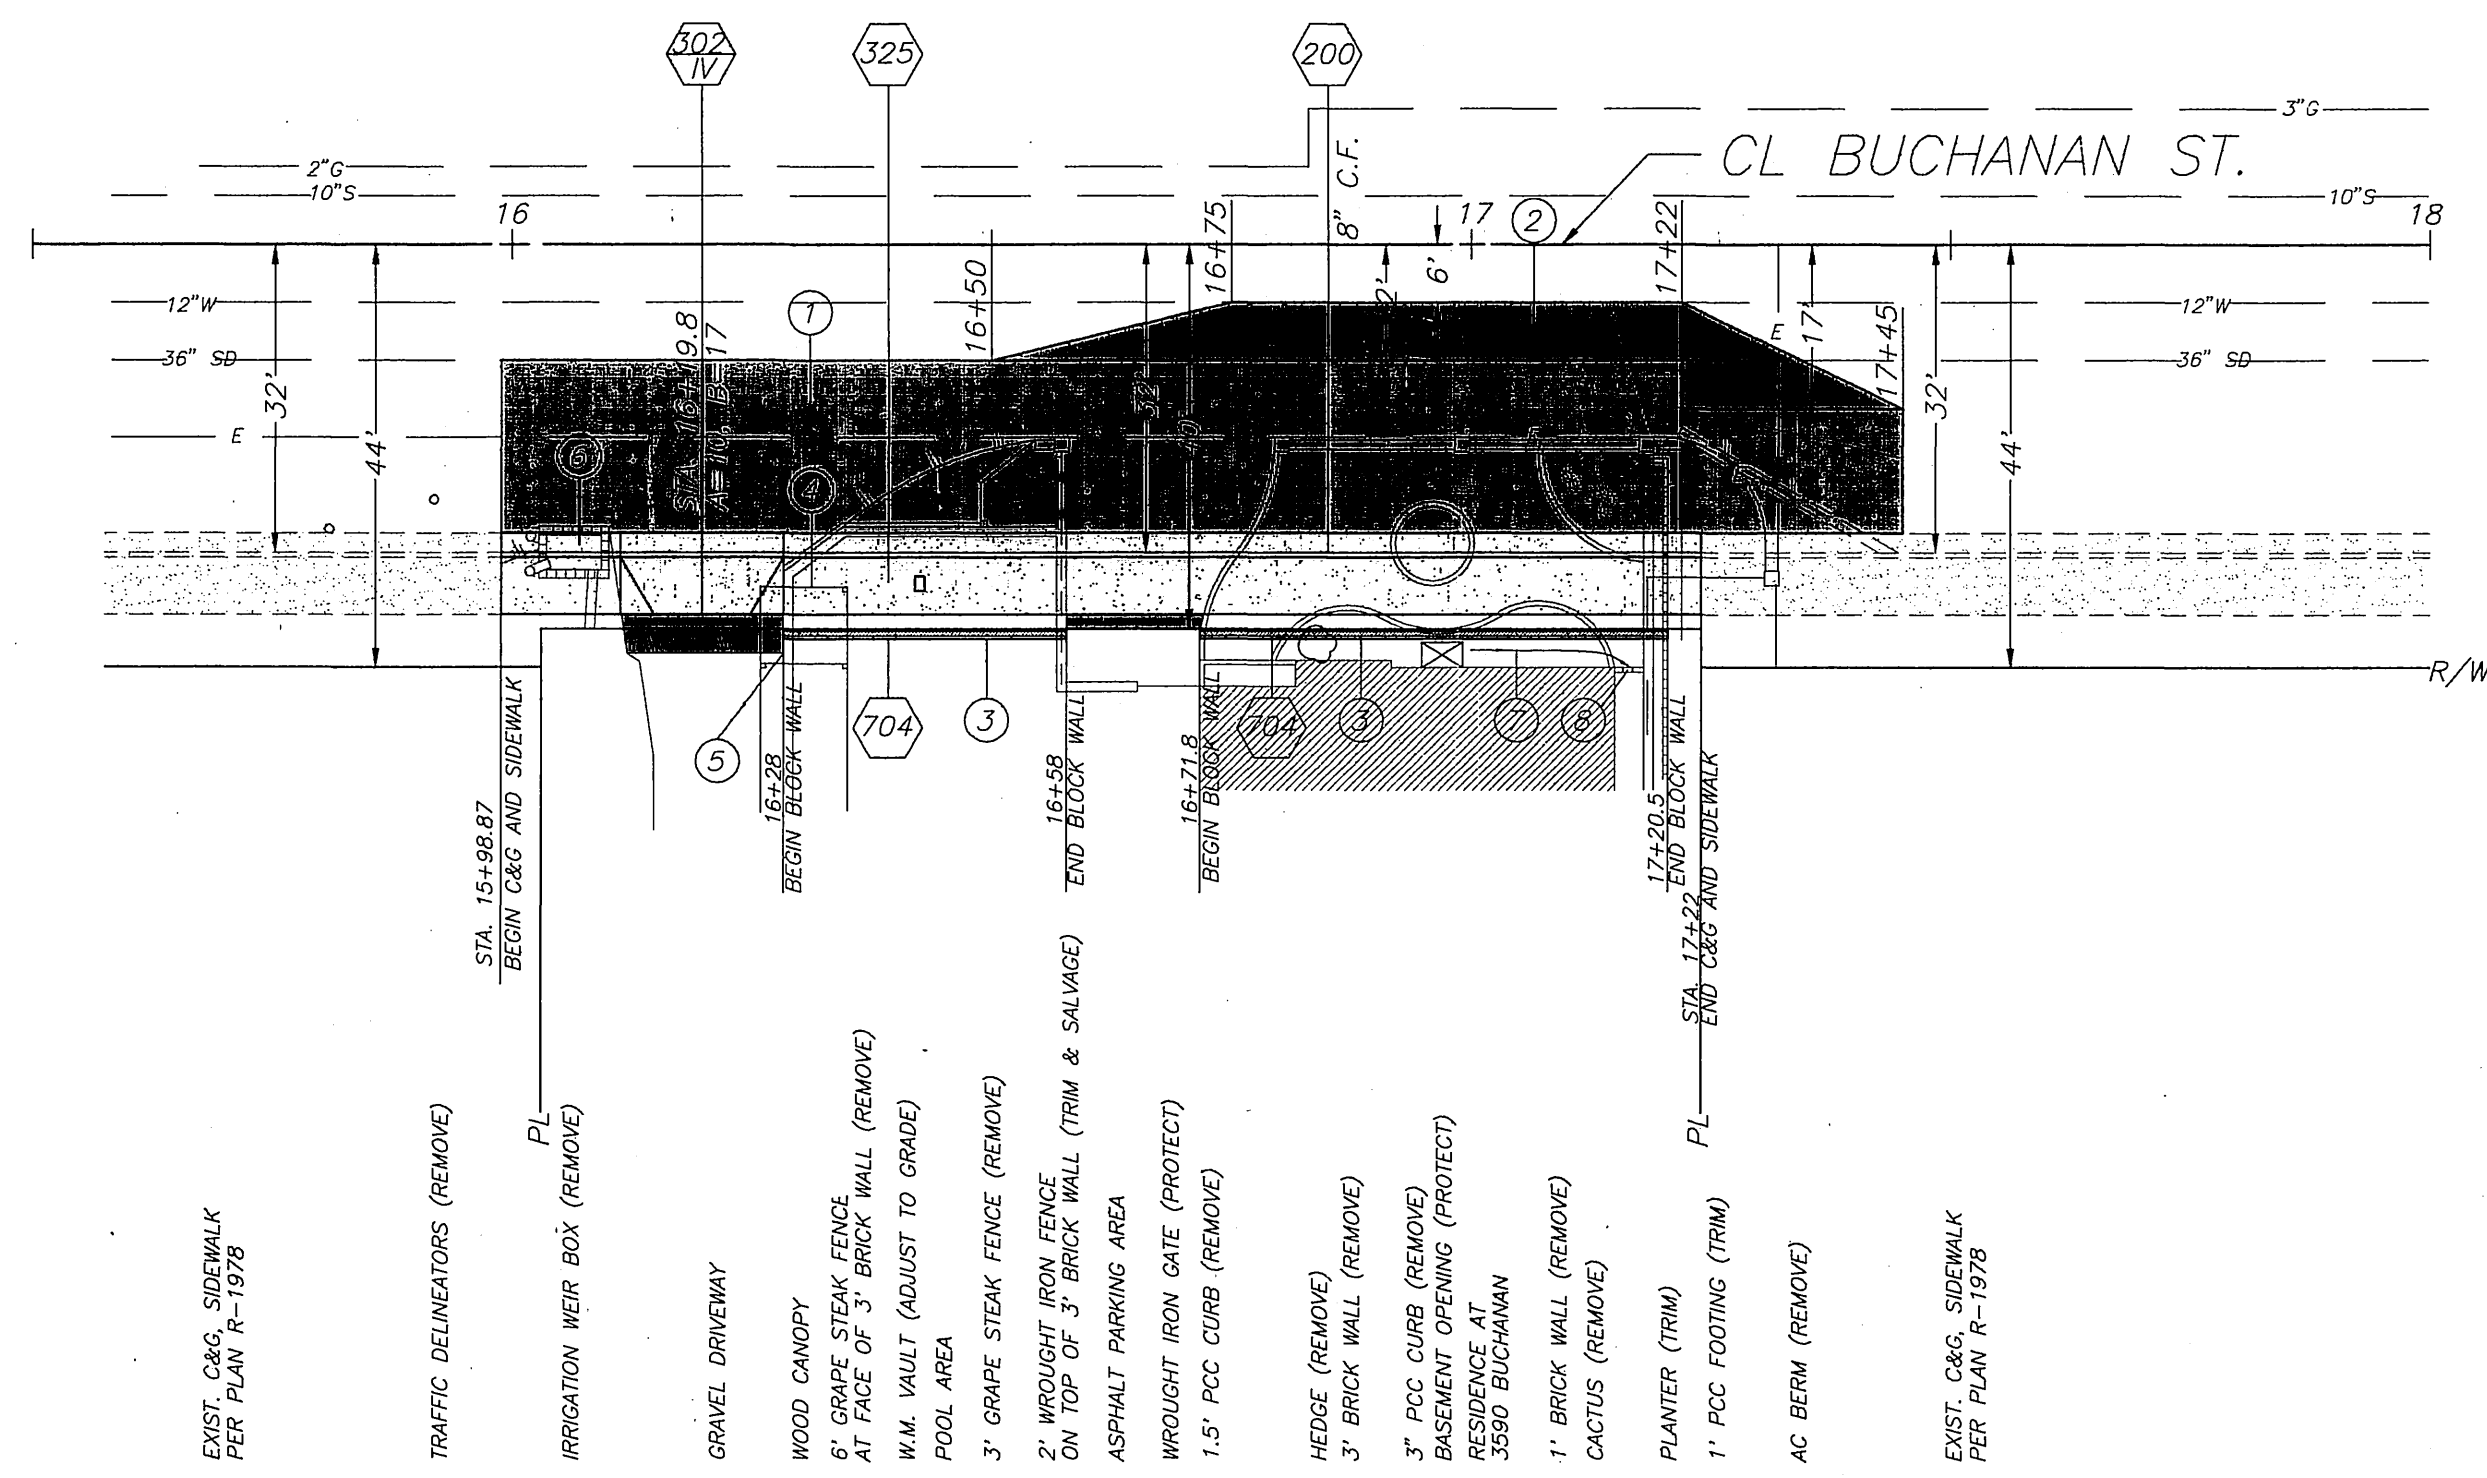


T.I = 7, R = 24
 ** OVERLAY BETWEEN STATIONS 16+50 AND 17+45
 ** BLOCK WALL BETWEEN STA. 16+28 AND 16+58
 AND BETWEEN STA. 16+71.8 AND 17+20.5

TYPICAL CROSS SECTION (NOT TO SCALE)
 STATIONS 15+98.87 TO 17+22

16 17 18

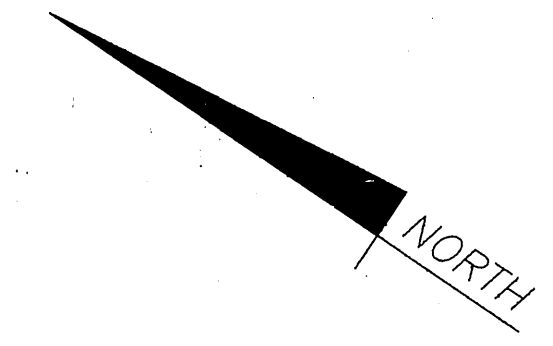

EXIST. C&G SIDEWALK
 PER PLAN R-1978

- TRAFFIC DELINEATORS (REMOVE)
- IRRIGATION WEIR BOX (REMOVE)
- GRAVEL DRIVEWAY
- WOOD CANOPY
- 6" GRATE OF BRICK WALL (REMOVE)
- W.M. VAULT (ADJUST TO GRADE)
- POOL AREA
- 3" GRAPPE STEAK FENCE (REMOVE)
- 2" WROUGHT IRON FENCE ON TOP OF 3" BRICK WALL (TRIM & SALVAGE)
- ASPHALT PARKING AREA
- WROUGHT IRON GATE (PROTECT)
- 1.5" PCC CURB (REMOVE)
- HEDGE (REMOVE)
- 3" BRICK WALL (REMOVE)
- 1" PCC CURB (REMOVE)
- BASEMENT OPENING (PROTECT)
- RESIDENCE AT 3590 BUCHANAN
- 1" BRICK WALL (REMOVE)
- CACTUS (REMOVE)
- PLANTER (TRIM)
- 1" PCC FOOTING (TRIM)
- AC BERM (REMOVE)
- EXIST. C&G SIDEWALK PER PLAN R-1978




GENERAL NOTES

1. EXISTING UTILITIES SHOWN ON THE PLANS ARE PLOTTED FROM UTILITY RECORDS. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO LOCATE AND PROTECT ALL UTILITIES WHETHER OR NOT SHOWN ON THE PLAN.
2. PRIME CONTRACTOR SHALL HAVE A CLASS 'A' OR 'C12' LICENSE.
3. ALL EXISTING BRICK WALLS, FENCES, PLANTING, AC BERM, PCC FOOTINGS WITHIN THE RIGHT OF WAY SHALL BE REMOVED.

CONSTRUCTION NOTES

1. REMOVE EXISTING AC PAVEMENT AND CONSTRUCT 0.35" AC OVER 0.90" CAB.
2. CONSTRUCT VARIABLE THICKNESS AC OVERLAY (0.10" MINIMUM).
3. CONSTRUCT 3"-4" HIGH, 6" THICK, GRAY PRECISION CONCRETE BLOCK WALL PER STANDARD DRAWING 704 AND TYPICAL BLOCK WALL DETAIL ON THIS SHEET. PAINT BLOCK WALL WITH EXTERIOR LATEX ENAMEL PAINT TO MATCH EXISTING COLOR. CAP WITH RED BRICKS SALVAGED FROM DEMOLISHED EXISTING BRICK WALLS. INSTALL PAINTED WROUGHT IRON FENCE (TO MATCH EXISTING) ON TOP OF BLOCK WALL.
4. REMOVE APPROXIMATELY 8' OF THE WOODEN CANOPY UP TO THE FIRST INTERIOR SUPPORT. SHORTEN AND SPLICE THE SOLAR PVC PIPES ON TOP OF THE CANOPY.
5. REMOVE EXISTING CORRUGATED FIBER SHEETS AND REINSTALL AS NEEDED TO CLOSE GAP BETWEEN PROPOSED BLOCK WALL AND EXISTING WALL.
6. DEMOLISH AND REMOVE IRRIGATION WEIR BOX AND PLUG ALL PIPES.
7. GRADE TO DRAIN AWAY FROM THE BASEMENT OPENING.
8. CONSTRUCT A SMALL OPENING TO ALLOW FOR DRAINAGE. OPENING SIZE SHALL BE DETERMINED IN THE FIELD BY THE ENGINEER.

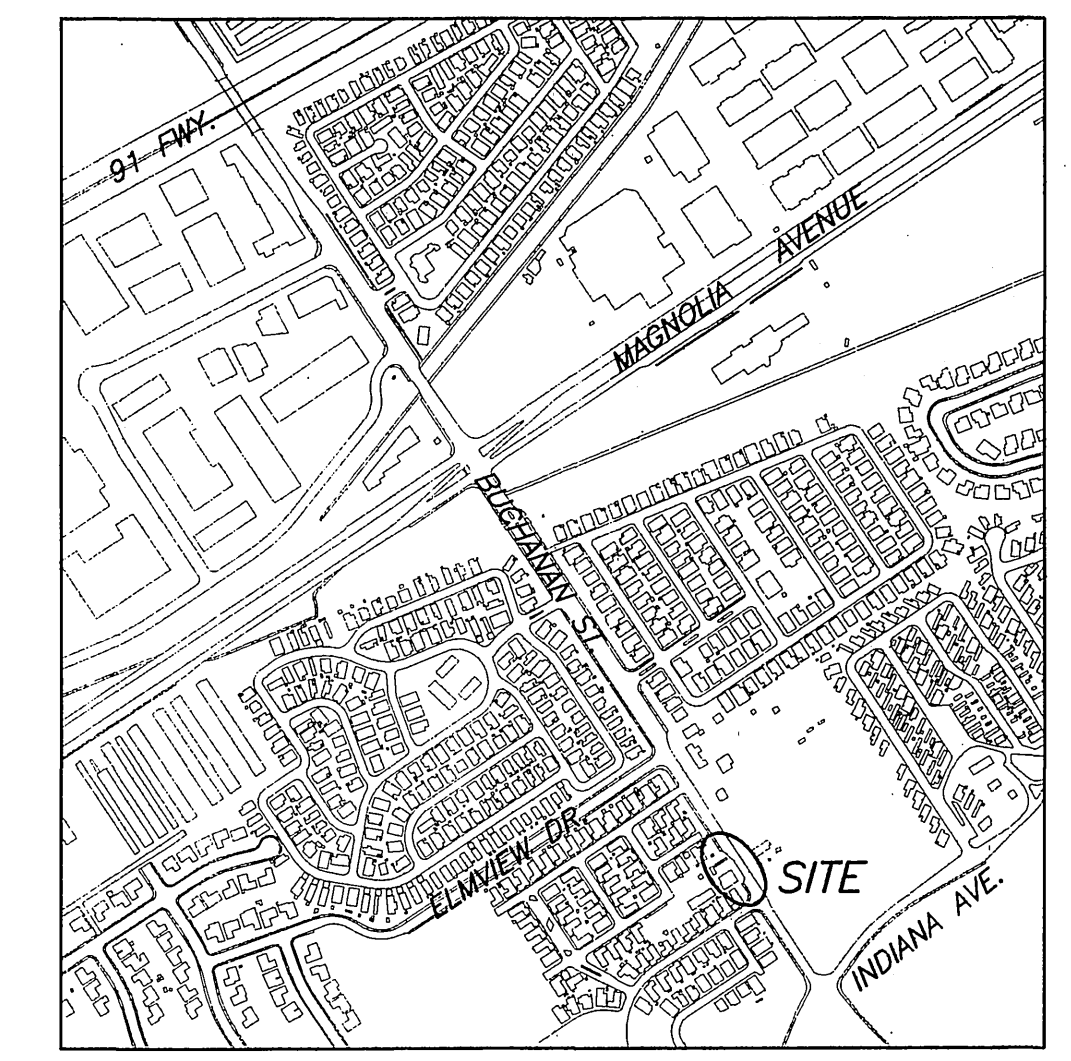

LOCATION MAP

IMPORTANT NOTICE
 SECTION 4216/4217 OF THE GOVERNMENT CODE REQUIRES A DIG ALERT IDENTIFICATION NUMBER TO BE ISSUED BEFORE A "PERMIT TO EXCAVATE" WILL BE VALID. FOR YOUR DIG ALERT I.D. NUMBER CALL TOLL FREE 1-800-422-4133 TWO WORKING DAYS BEFORE YOU DIG.

<p>CITY OF RIVERSIDE, CALIFORNIA PUBLIC WORKS DEPARTMENT</p>	<p>APPROVED BY _____ BY DATE _____</p> <p>DEPUTY P.W. DIRECTOR _____</p> <p>PRINCIPAL ENGINEER _____</p> <p>SURVEYOR _____</p> <p>STREET SERVICES _____</p> <p>TRAFFIC _____</p>		<p>BUCHANAN STREET IMPROVEMENTS AT 3590 BUCHANAN ST.</p> <p>ACCOUNT NUMBER 432-541500-440302-30324</p> <p>R-3346</p> <p>SHEET 1 OF 1</p> <p>FILE NO. _____</p>
	<p>DESIGNED BY P.H./D.S. DRAWN BY P.H. CHECKED BY _____</p> <p>DATE 7/22/93</p> <p>DATE 7/28/93</p>		

INDEXED 11-12-93 4-H