

SIGNING & STRIPING SPECIAL NOTES

- M.U.T.C.D. REFERS TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (2003 EDITION) AS AMENDED BY THE 2003 CALIFORNIA SUPPLEMENT
- CALTRANS REFERS TO THE CALIFORNIA DEPARTMENT OF TRANSPORTATION STANDARD PLANS, LATEST EDITION.

SYCAMORE CREEK DISTRIBUTION FACILITY


STRIPING CONSTRUCTION NOTES

- INSTALL THERMOPLASTIC 4" DASHED WHITE LANE LINE PER M.U.T.C.D. FIGURE 3A-102, DETAIL 12
- INSTALL THERMOPLASTIC LANE DROP ARROW PER CALTRANS STD. PLAN A24A
- INSTALL THERMOPLASTIC 6" BIKE LANE LINE PER M.U.T.C.D. FIGURE 3A-112, DETAIL 39
- INSTALL THERMOPLASTIC 4" SOLID DOUBLE YELLOW LINE PER M.U.T.C.D. FIGURE 3A-104, DETAIL 22
- INSTALL THERMOPLASTIC TYPE IV ARROW PER CALTRANS STD. PLAN A24A
- INSTALL THERMOPLASTIC 8" SOLID WHITE LINE PER M.U.T.C.D. FIGURE 3A-112, DETAIL 38
- INSTALL THERMOPLASTIC 4" WHITE EDGELINE PER M.U.T.C.D. FIGURE 3A-110, DETAIL 27B
- INSTALL SIGN AND POST PER CITY OF RIVERSIDE STD. DWG. NO. 666
- INSTALL TYPE N MARKER AND W1-8
- INSTALL BLUE REFLECTIVE FIRE HYDRANT PAVEMENT MARKER
- INSTALL THERMOPLASTIC BIKE LANE, PER M.U.T.C.D. FIGURE 3A-112, DETAIL 39A
- INSTALL THERMOPLASTIC MEDIAN ISLAND PER M.U.T.C.D. FIGURE 3A-110, DETAIL 29
- INSTALL 12" YELLOW DIAGONALS
- INSTALL 12" WHITE DIAGONALS

REMOVAL NOTES

- REMOVE EXISTING STRIPING USING WET SANDBLASTING




D.R. 061-012

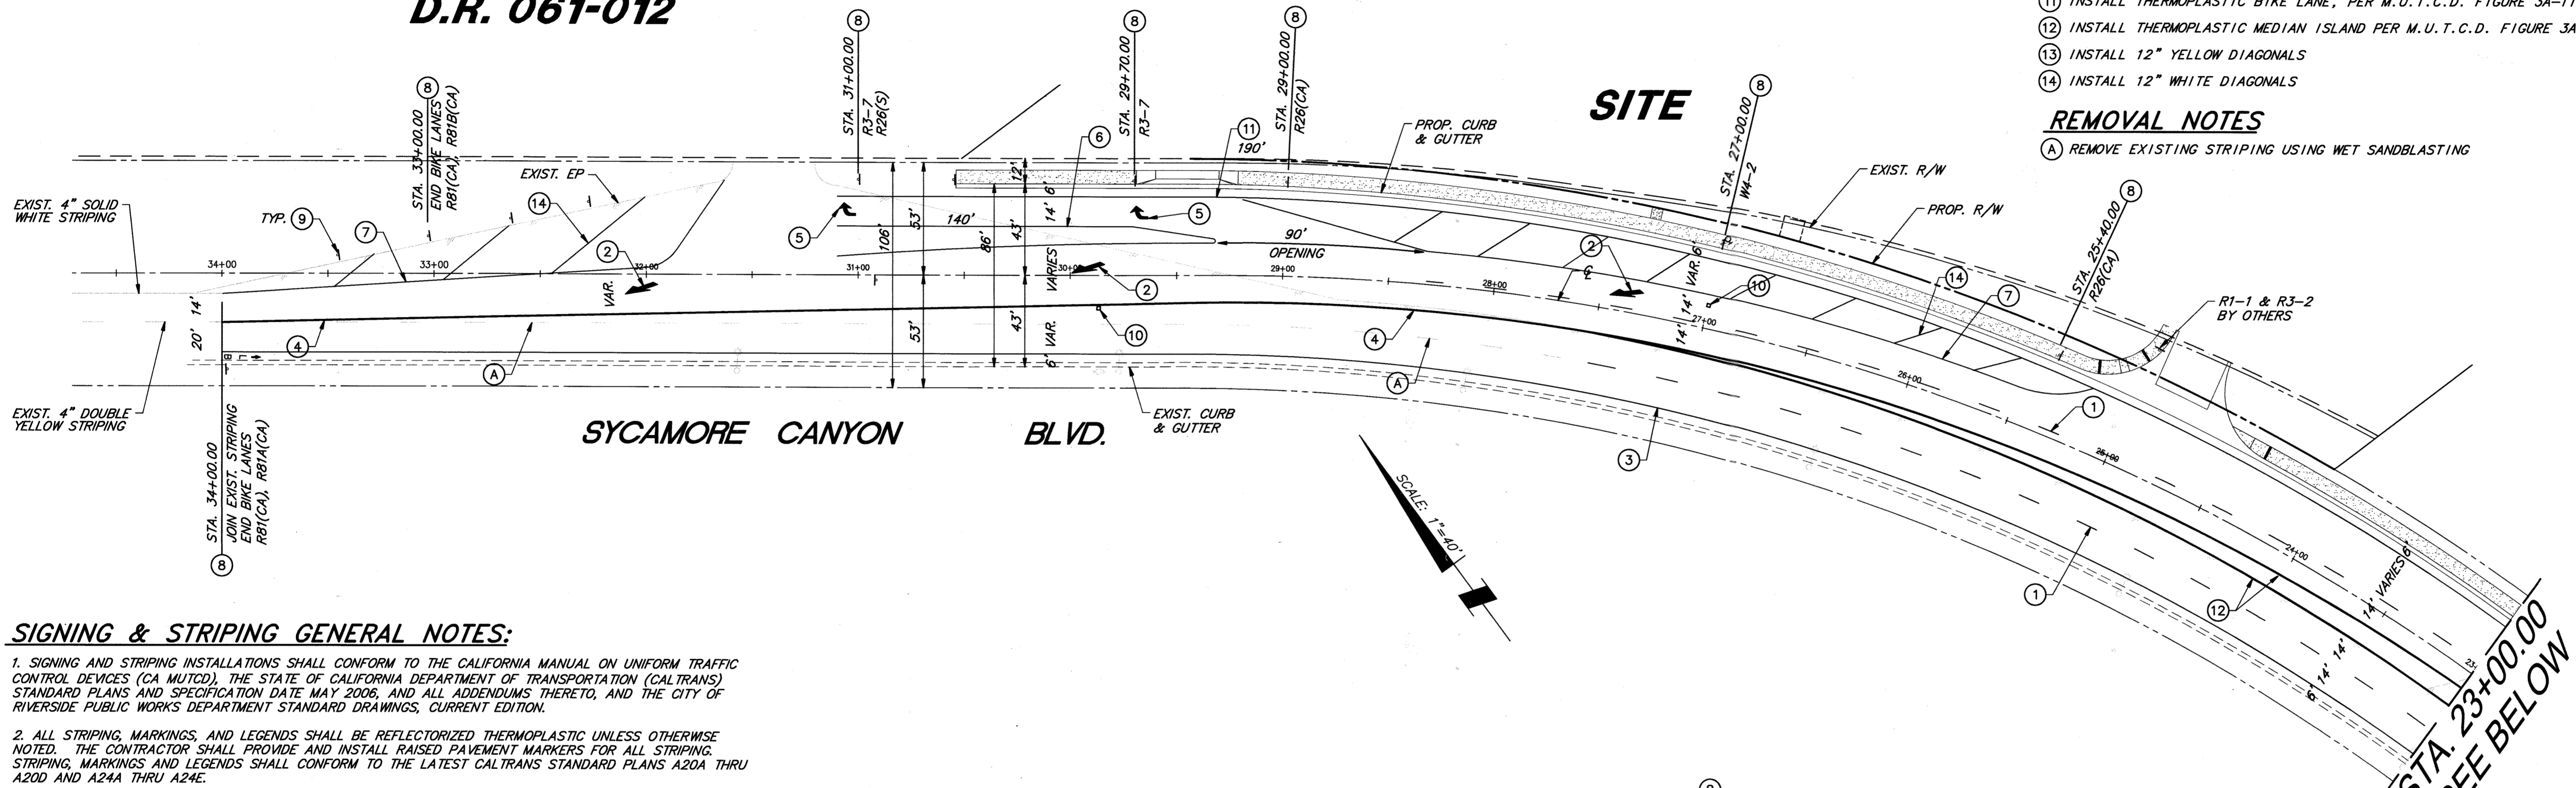

SIGNING & STRIPING GENERAL NOTES:

- SIGNING AND STRIPING INSTALLATIONS SHALL CONFORM TO THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CA MUTCD), THE STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION (CALTRANS) STANDARD PLANS AND SPECIFICATION DATE MAY 2006, AND ALL ADDENDUMS THERETO, AND THE CITY OF RIVERSIDE PUBLIC WORKS DEPARTMENT STANDARD DRAWINGS, CURRENT EDITION.
- ALL STRIPING, MARKINGS, AND LEGENDS SHALL BE REFLECTORIZED THERMOPLASTIC UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL PROVIDE AND INSTALL RAISED PAVEMENT MARKERS FOR ALL STRIPING. STRIPING, MARKINGS AND LEGENDS SHALL CONFORM TO THE LATEST CALTRANS STANDARD PLANS A20A THRU A20D AND A24A THRU A24E.
- PRIOR TO FINAL ACCEPTANCE OF STREET IMPROVEMENTS, ALL PAVEMENT STRIPING AND STENCILING WITHIN THE PERIMETER OF THE CONSTRUCTION AREA SHALL BE RESTORED TO LIKE NEW CONDITION, IN A MANNER MEETING THE APPROVAL OF THE CITY OF RIVERSIDE.
- THE CONTRACTOR SHALL RESTRIPE EXISTING STRIPING AND CURB MARKINGS OBLITERATED BY NEW CONSTRUCTION, WHETHER OR NOT SHOWN ON THE PLANS FOR REPLACEMENT, AT NO COST TO THE CITY.
- AT LOCATIONS WHERE EXISTING PAINTED CURB IS TO BE RECONSTRUCTED, THE CONTRACTOR SHALL PAINT THE NEW CURB AS SHOWN ON THE PLANS WITHIN 10 WORKING DAYS OF CURB CONSTRUCTION OR AS DIRECTED BY ENGINEER. THE PAINT SHALL BE WATER-BASED WITH 2-YEAR GUARANTEE AGAINST COLOR FADING. PRIOR TO THE START OF CONSTRUCTION, THE CONTRACTOR SHALL SUBMIT TO THE CITY WRITTEN PROOF OF THE MANUFACTURER'S 2-YEAR GUARANTEE.
- ALL NEW STRIPING SHALL BE "CAT TRACKED" AND APPROVED BY THE ENGINEER PRIOR TO FINAL INSTALLATION. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AFTER COMPLETING LAYOUT AND AT LEAST 3 WORKING DAYS BEFORE COMMENCING INSTALLATION OF STRIPING, MARKINGS AND MARKERS.
- TRAFFIC SIGN FACE REFLECTIVE SHEETING SHALL BE 3M "ASTM TYPE 11" OR APPROVED EQUAL WITH PROTECTIVE GRAFFITI OVERLAY FILM OR AS OTHERWISE NOTED. ALL WARNING SIGNS SHALL HAVE A FLUORESCENT YELLOW BACKGROUND AND SCHOOL SIGNS NOTED SHALL HAVE A FLUORESCENT YELLOW-GREEN BACKGROUND.
- SIGNS SHALL BE STANDARD SIZE UNLESS NOTED OTHERWISE. PRIOR TO INSTALLATION, NEW SIGNS SHALL BE APPROVED BY THE CITY OF RIVERSIDE. EXACT LOCATIONS OF SIGNS SHALL BE DETERMINED BY THE CITY ENGINEER.
- SALVAGED SIGNS AND SIGN POSTS SHALL BE DELIVERED TO THE CITY OF RIVERSIDE SIGN DEPARTMENT.
- WHEN PAINT IS SPECIFIED, TRAFFIC STRIPES AND MARKINGS SHALL BE APPLIED IN TWO COATS. A MINIMUM OF SEVEN DAYS SHALL BE PROVIDED BETWEEN FIRST AND SECOND COATS.
- STRIPING SHALL BE APPLIED WITHIN 48 HOURS OF SURFACE COURSE REPLACEMENT ON STREETS OPEN TO THE PUBLIC. IN NO CASE SHALL A NEWLY PAVED STREET OPEN TO THE PUBLIC BE LEFT UNSTRIPED OVER A WEEKEND OR HOLIDAY.
- CONTRACTOR SHALL INSTALL NEW SIGN(S) AND/OR POST(S) PER CITY OF RIVERSIDE STANDARD DRAWING No. 666.
- ALL CONFLICTING STRIPING, PAVEMENT MARKINGS, LEGENDS, AND RAISED PAVEMENT MARKERS SHALL BE REMOVED EVEN IF NOT SHOWN ON PLANS. REMOVALS OF STRIPING, PAVEMENT MARKINGS AND LEGENDS SHALL BE DONE BY WET SAND BLASTING AND/OR GRINDING, BLACK OUT IS NOT PERMITTED. ALL DAMAGED PAVEMENT DUE TO REMOVALS SHALL BE REPAIRED AS NECESSARY TO MAINTAIN A SMOOTH AND UNIFORM SURFACE OR AS DIRECTED BY THE ENGINEER.

P.M. 31802

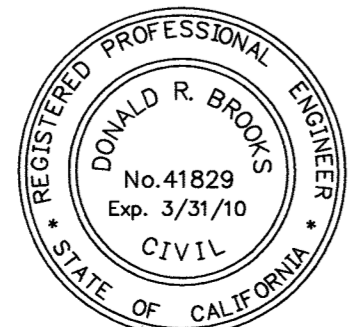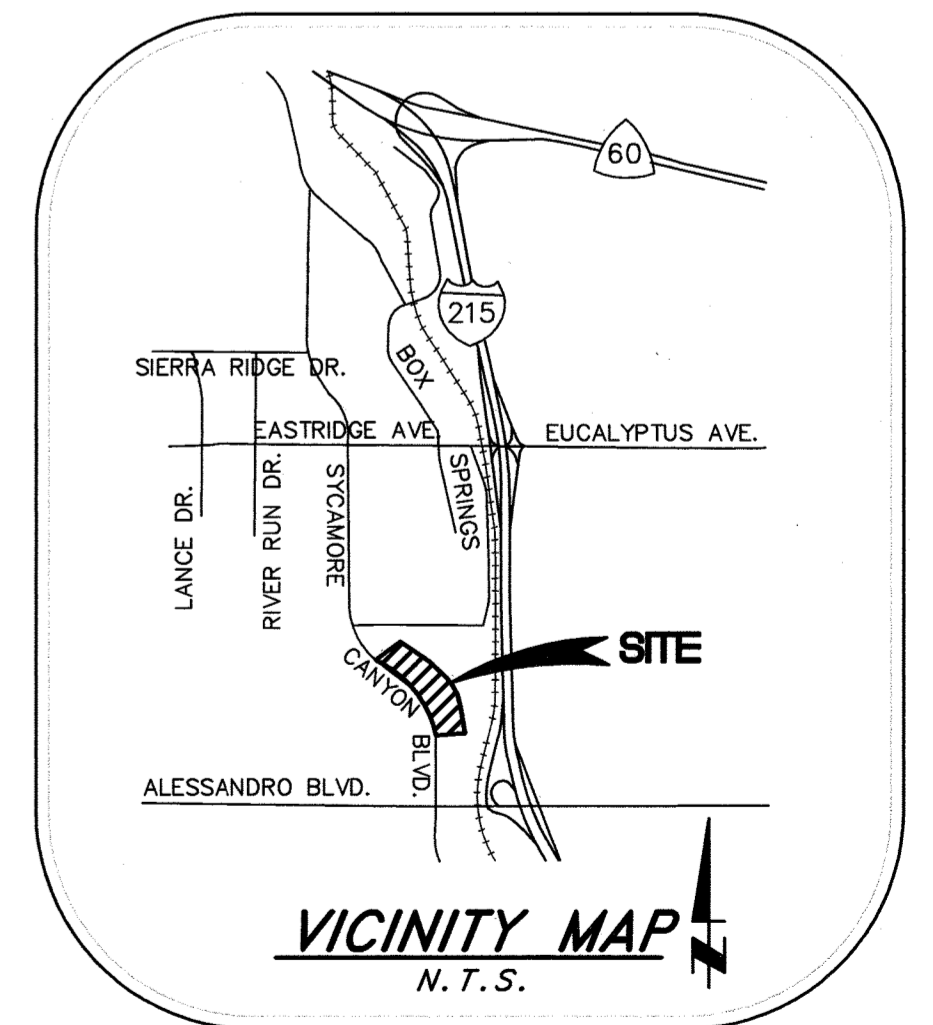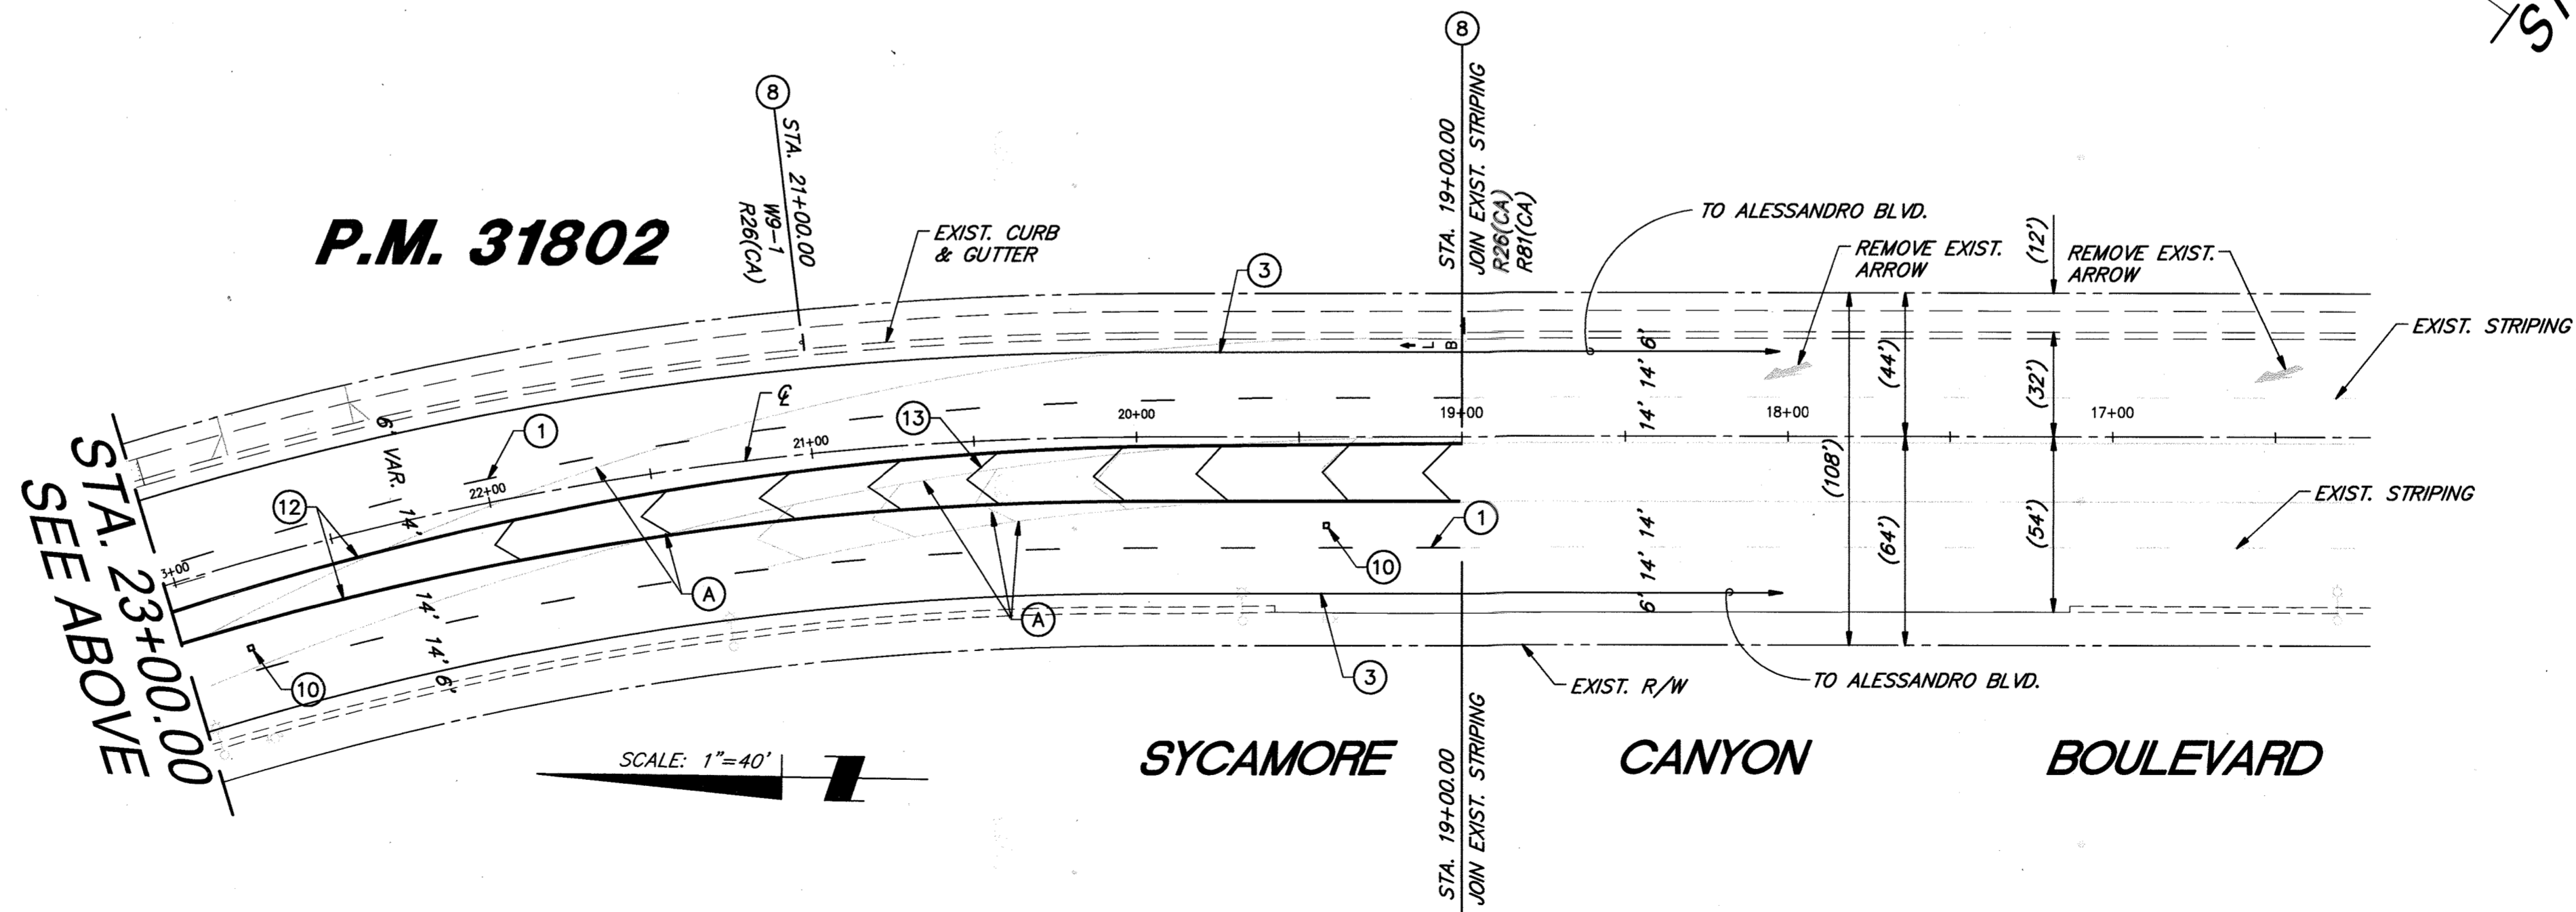

SB&O INC.
 PLANNING ENGINEERING SURVEYING
 11025 SOUTH MILLIKEN AVENUE, SUITE E
 QINTARO, CA 91761
 909-638-0338
 909-635-0365 FAX

Don Brooks
 DON BROOKS, R.C.E. 41829 EXP. 3/31/10 DATE 4.30.08

MARK	REVISIONS	APPR.	DATE

CITY OF RIVERSIDE, CALIFORNIA PUBLIC WORKS DEPARTMENT			
APPROVED BY	BY	DATE	APPROVED BY

SIGNING & STRIPING PLANS	
7130 SYCAMORE CANYON BLVD. STA. 23+00.00 TO STA. 30+53.92	
HORIZ. SCALE:	VERT. SCALE:

XL-583
SHEET 1 OF 1
FILE NO. 65502.10