

SIGNING AND STRIPING GENERAL NOTES


1. STRIPING, SIGNING OR PAVEMENT LEGENDS SHALL NOT BE INSTALLED PRIOR TO FIELD INSPECTION AND APPROVAL BY THE INSPECTOR.
2. ALL PAVEMENT MARKINGS AND LOCATIONS MUST BE INSPECTED AND APPROVED BEFORE STRIPING BEGINS. THE INSPECTOR SHALL DETERMINE THE EXACT LIMITS OF THE MATCH STRIPING.
3. ALL WARNING SIGNS SHALL USE HI-INTENSITY GRADE REFLECTIVE SHEETING AND BE A MINIMUM OF 30"x30". OTHER REGULATORY OR GUIDE SIGNS MAY BE ENGINEERING GRADE REFLECTIVE SHEETING.
4. UNLESS OTHERWISE STATED, ALL STRIPING SHALL BEGIN AND TERMINATE AT THE CENTER DELTA OF THE CURB RETURN, OR BACK OF THE CROSSWALK OR STOP BAR.
5. ALL PAVEMENT MARKERS, STRIPING, AND PAVEMENT MARKINGS SHALL CONFORM TO THE CALTRANS STANDARD PLANS; A20-A THROUGH A24-E.
6. THE POST MATERIAL SHALL BE "TELESPAR QMK-PUNCH" OR APPROVED EQUAL WITH RECEPTIVE 30-INCH OR 36-INCH ANCHOR ASSEMBLY.
7. ALL PAVEMENT STRIPING SHALL BE INSTALLED PER SECTION 84.3 OF THE CALTRANS STANDARD SPECIFICATIONS.
8. ALL PAVEMENT LEGENDS, LIMIT LINES, CROSSWALKS, AND ARROWS SHALL BE THERMOPLASTIC INSTALLED PER SECTION 84.2 OF THE CALTRANS STANDARD SPECIFICATIONS.

LEGEND

REMOVE	EXISTING	PROPOSED	
			TYPE IV (L or R) PAVEMENT ARROW
			STREET LIGHT LUMINAIRE
			SIGN
			TRAFFIC STRIPE OR MARKING

CONSTRUCTION NOTES:

- 1 REMOVE ALL CONFLICTING STRIPING AND PAVEMENT MARKINGS BY WET SANDBLASTING UNLESS OTHERWISE APPROVED METHOD.
- 2 INSTALL 12" WHITE CROSSWALK (10' SPACING) OR LIMIT LINE AS SHOWN.
- 3 INSTALL PAVEMENT LEGEND AS SHOWN.
- 4 INSTALL 8" WHITE STRIPE, PER STATE STD. PLAN A20D, DETAIL 38.
- 5 INSTALL 50 L.F. OF SOLID WHITE LANE LINE AS SHOWN.
- 6 INSTALL DOUBLE YELLOW LINE PER STATE STD. PLAN A20A, DETAIL 22.
- 7 INSTALL 4" WHITE RIGHT EDGE LINE PER STATE STD. PLAN A20B, DETAIL 27B.
- 8 INSTALL 4" YELLOW LEFT EDGE LINE PER STATE STD. PLAN A20B, DETAIL 25.
- 9 INSTALL PAINTED MEDIAN ISLAND PER STATE STD. PLAN A20B, DETAIL 29.
- 10 INSTALL NEW SIGN AND POST AS SHOWN.
- 11 INSTALL NEW SIGN-POST AND **RL** EXISTING SIGN(S) ON NEW POST.
- 12 INSTALL DELINEATORS AS SHOWN.
- 13 INSTALL 4" LANE LINE PER STATE STD. PLAN A20A, DETAIL 12.

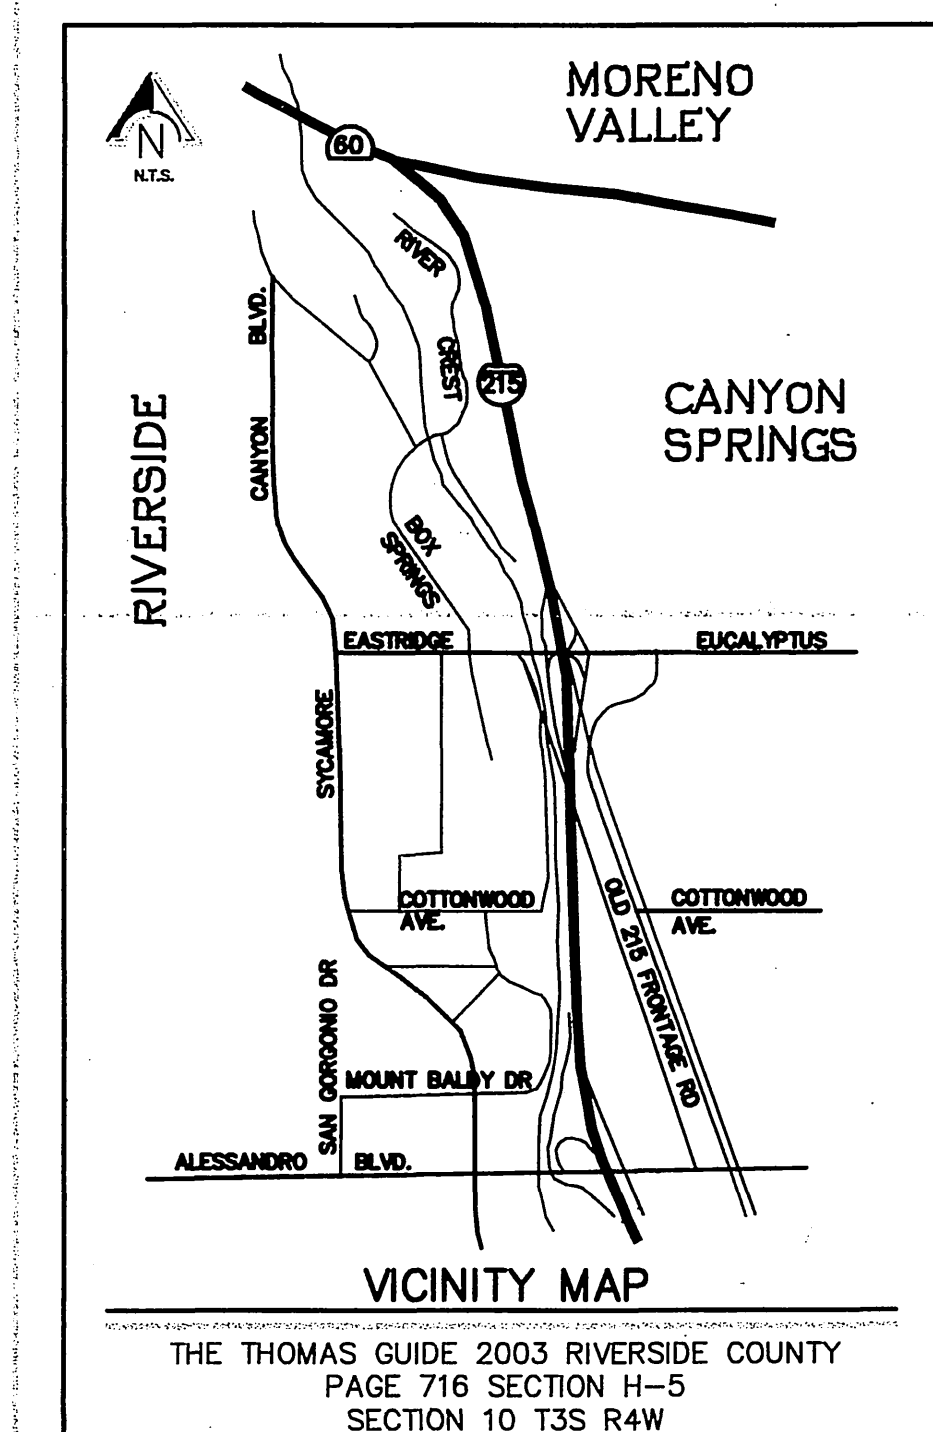

IMPORTANT NOTICE
 Section 4216/4217 of the Government Code requires a 24-hour identification number to be issued before a permit to excavate will be valid. For your 24-hour ID, Number call **CALL TOLL FREE TWO WORKING DAYS BEFORE YOU DIG UNDERGROUND SERVICE ALERT 1-800-227-2600**

SEAL-COUNTY REGISTERED PROFESSIONAL ENGINEER
 No. 33950
 EXP. 6-30-06
 CIVIL
 STATE OF CALIFORNIA

COUNTY OF RIVERSIDE
 TRANSPORTATION DEPARTMENT
 APPROVED BY: *[Signature]* 9/19/05
 KHALED A. OTHMAN, P.E.
 R.C.E. 38990 EXP. 6-30-06
 RECOMMENDED DATE 9/6/05

SEAL-ENGINEER REGISTERED PROFESSIONAL ENGINEER
 No. C 46585
 EXP. 6-30-07
 CIVIL
 STATE OF CALIFORNIA

PLANS DESIGNED BY: *[Signature]* 7/8/05
 DATE
 Katz, Okitsu & Associates
 Traffic Engineers and Transportation Planners
 685 E. CARNEGIE DRIVE, SUITE 125
 SAN BERNARDINO, CA 92408
 Tel: 909.890.9893 Fax: 909.890.9894
 www.katzokitsu.com

CITY OF RIVERSIDE, CALIFORNIA
 DEPARTMENT OF PUBLIC WORKS
 APPROVED BY: *[Signature]*
 PRINCIPAL ENGINEER BY DATE
 TRAFFIC DIVISION PC 8/19/05
 DATE 8/19/05

SIGNING AND STRIPING PLAN
 MS 4016 (PM 24754) I.P. 050046
 ALESSANDRO BLVD.
 AT
 SAN GORGONIO ST.
 1" = 40'

ACCT. NO. XXXX-XXXXXX-XXXXXX
 XL-536
 SHEET 1 OF 1
 FILE NAME