WATER | ENERGY | LIFE

CITY OF RIVERSIDE PUBLIC UTILITIES

RPU METER LABELING REQUIREMENTS- COMMERCIAL

RiversidePublicUtilities.com
3900 Main St., 3rd Floor, Riverside CA 92522
951-826-5489

A PLACARD WITH ADDRESSES & SUITE NUMBERS NEEDS TO BE PLACED, IDENTIFYING WHICH METER SECTION FEEDS WHICH SUITE, ADDRESS. ALSO, HOUSE METER NEEDS A SMALL PLACARD IDENTIFY “HSE”. THE PLACARD NEEDS TO BE BLACK BACKGROUND WITH A MINIMUM 1 IN. WHITE LETTERING. THESE PLACARDS ARE OF VITAL IMPORTANCE DURING EMERGENCY SITUATIONS.

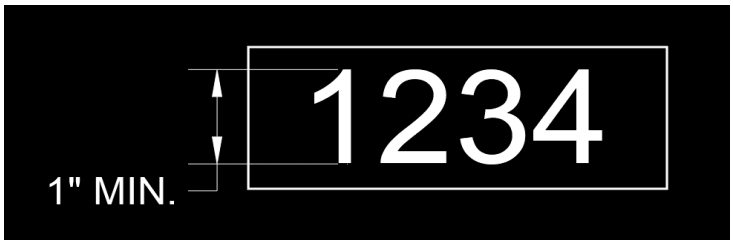

MARKER IS NOT PERMITTED

Labeling Requirements for SOLAR:

If the A/C disconnect is located at the ADU, a placard must be placed at the main service panel.

NEC 690.56(B): The placard shall denote the location and disconecting means of each power source. The placard shall be marked with the wording "**CAUTION: MULTIPLE SOURCES OF POWER**"

NEC 690.12(D): The placard shall indicate the location of the rapid shutdown intiation devices. The label shall include a simple digram of a building with a roof and include the following in CAPITAL LETTERS in a Black or Yellow Background:

"**SOLAR PV SYSTEM IS EQUIPPED WITH RAPID SHUTDOWN**" Minimum character height is 3/8 inches.

The "**RAPID SHUTDOWN SWITCH**" shall have a label located no more than 3 feet from the switch. The label shall be reflective and in CAPITAL LETTERS in a White or Red Background. Minimum character height is 3/8 inches.

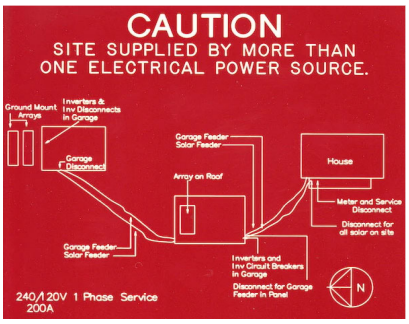

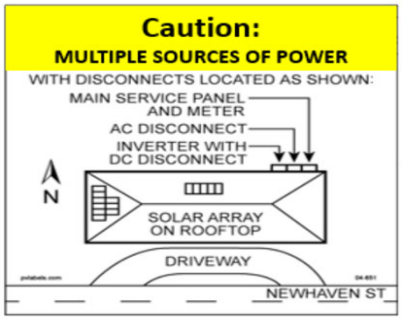

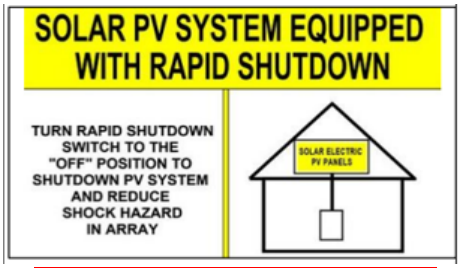

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

***** Inspection will not pass without proper meter labeling *****