Revision

DATE: 6/20/07

REVISION: Obsolete, Refer to UGS 115.1

DATE: 6/25/07

APPROVAL: Dave Redding

CITY OF RIVERSIDE PUBLIC UTILITIES

POLE RISER CONDUIT INSTALLATION

UGS

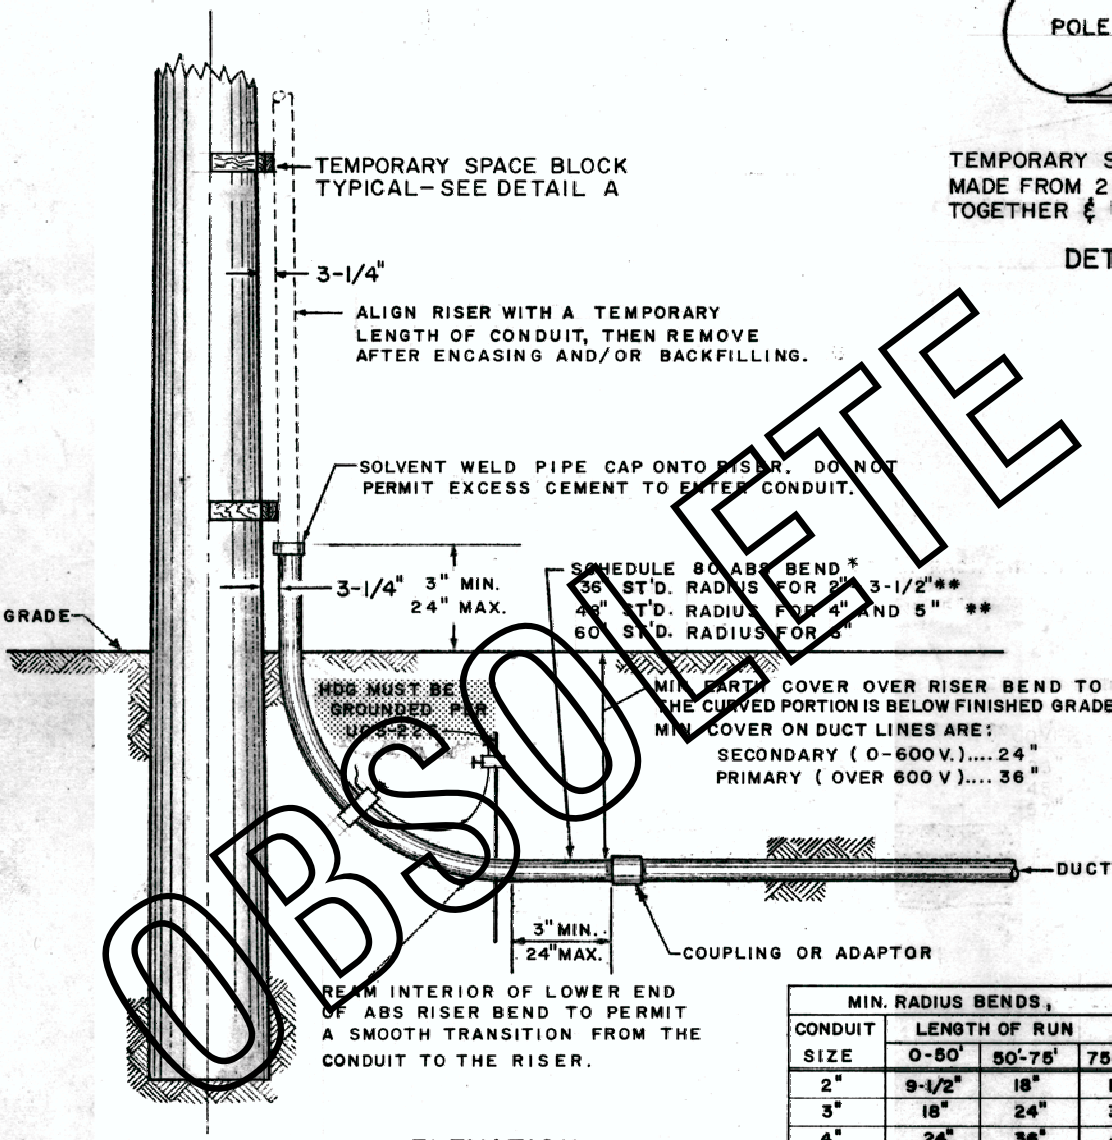

ELEVATION



TEMPORARY SPACE BLOCK MADE FROM 2x4's NAILED TOGETHER & 1x4 BRACES.

DETAIL A

MIN. RADIUS BENDS,			
CONDUIT SIZE	LENGTH OF RUN 0-50'	50'-75'	75'-100'
2"	9-1/2"	18"	18"
3"	18"	24"	36"
4"	24"	36"	48"
5"	24"	36"	48"

* USE HDG RISER BENDS ONLY WHEN SPECIFIED ON WORKING DRAWINGS.

** FOR SHORT RUNS OF CONDUIT WITH NOT MORE THAN 225° IN BENDS, INCLUDING RISER BEND(S), SHORT RADIUS BENDS AS LISTED IN THE CHART ABOVE MAY BE USED.

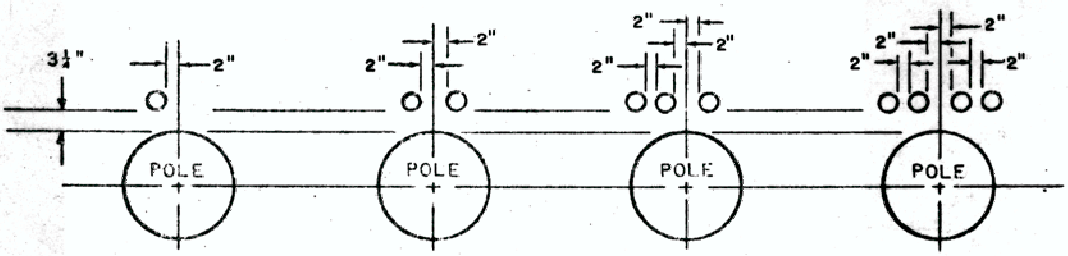

OBSOLETE