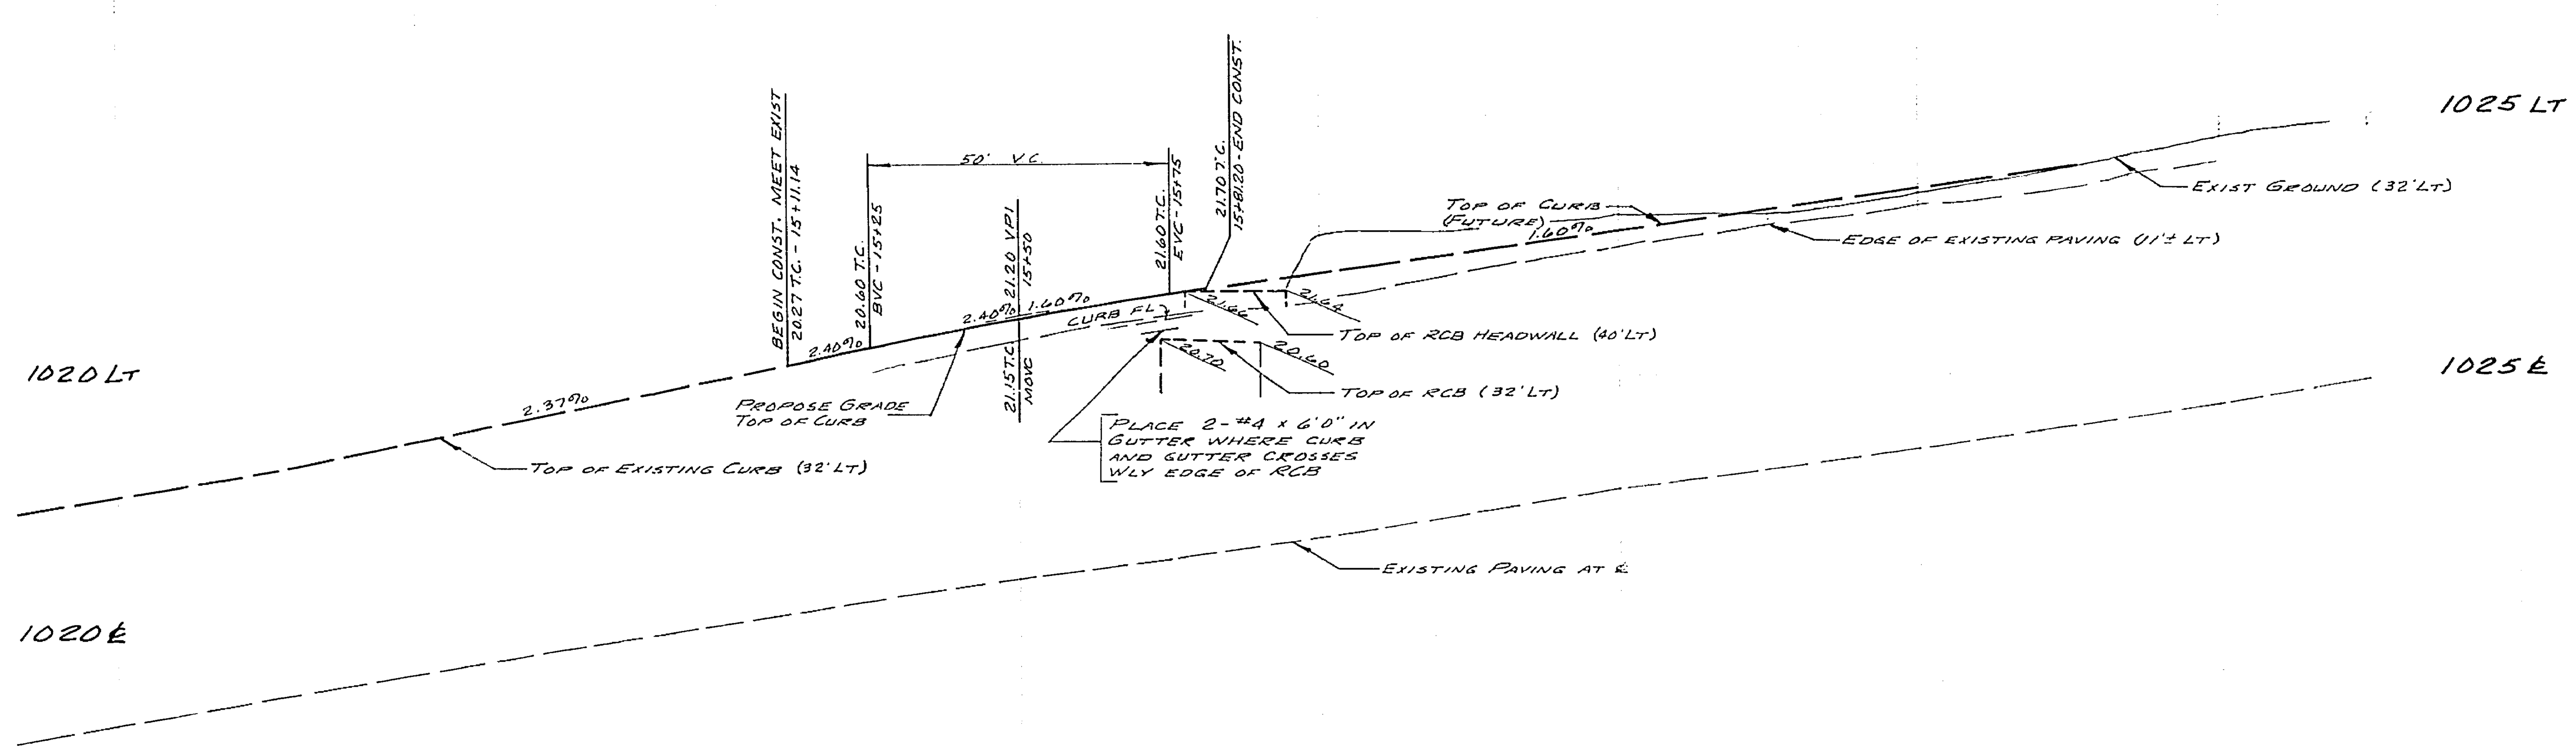

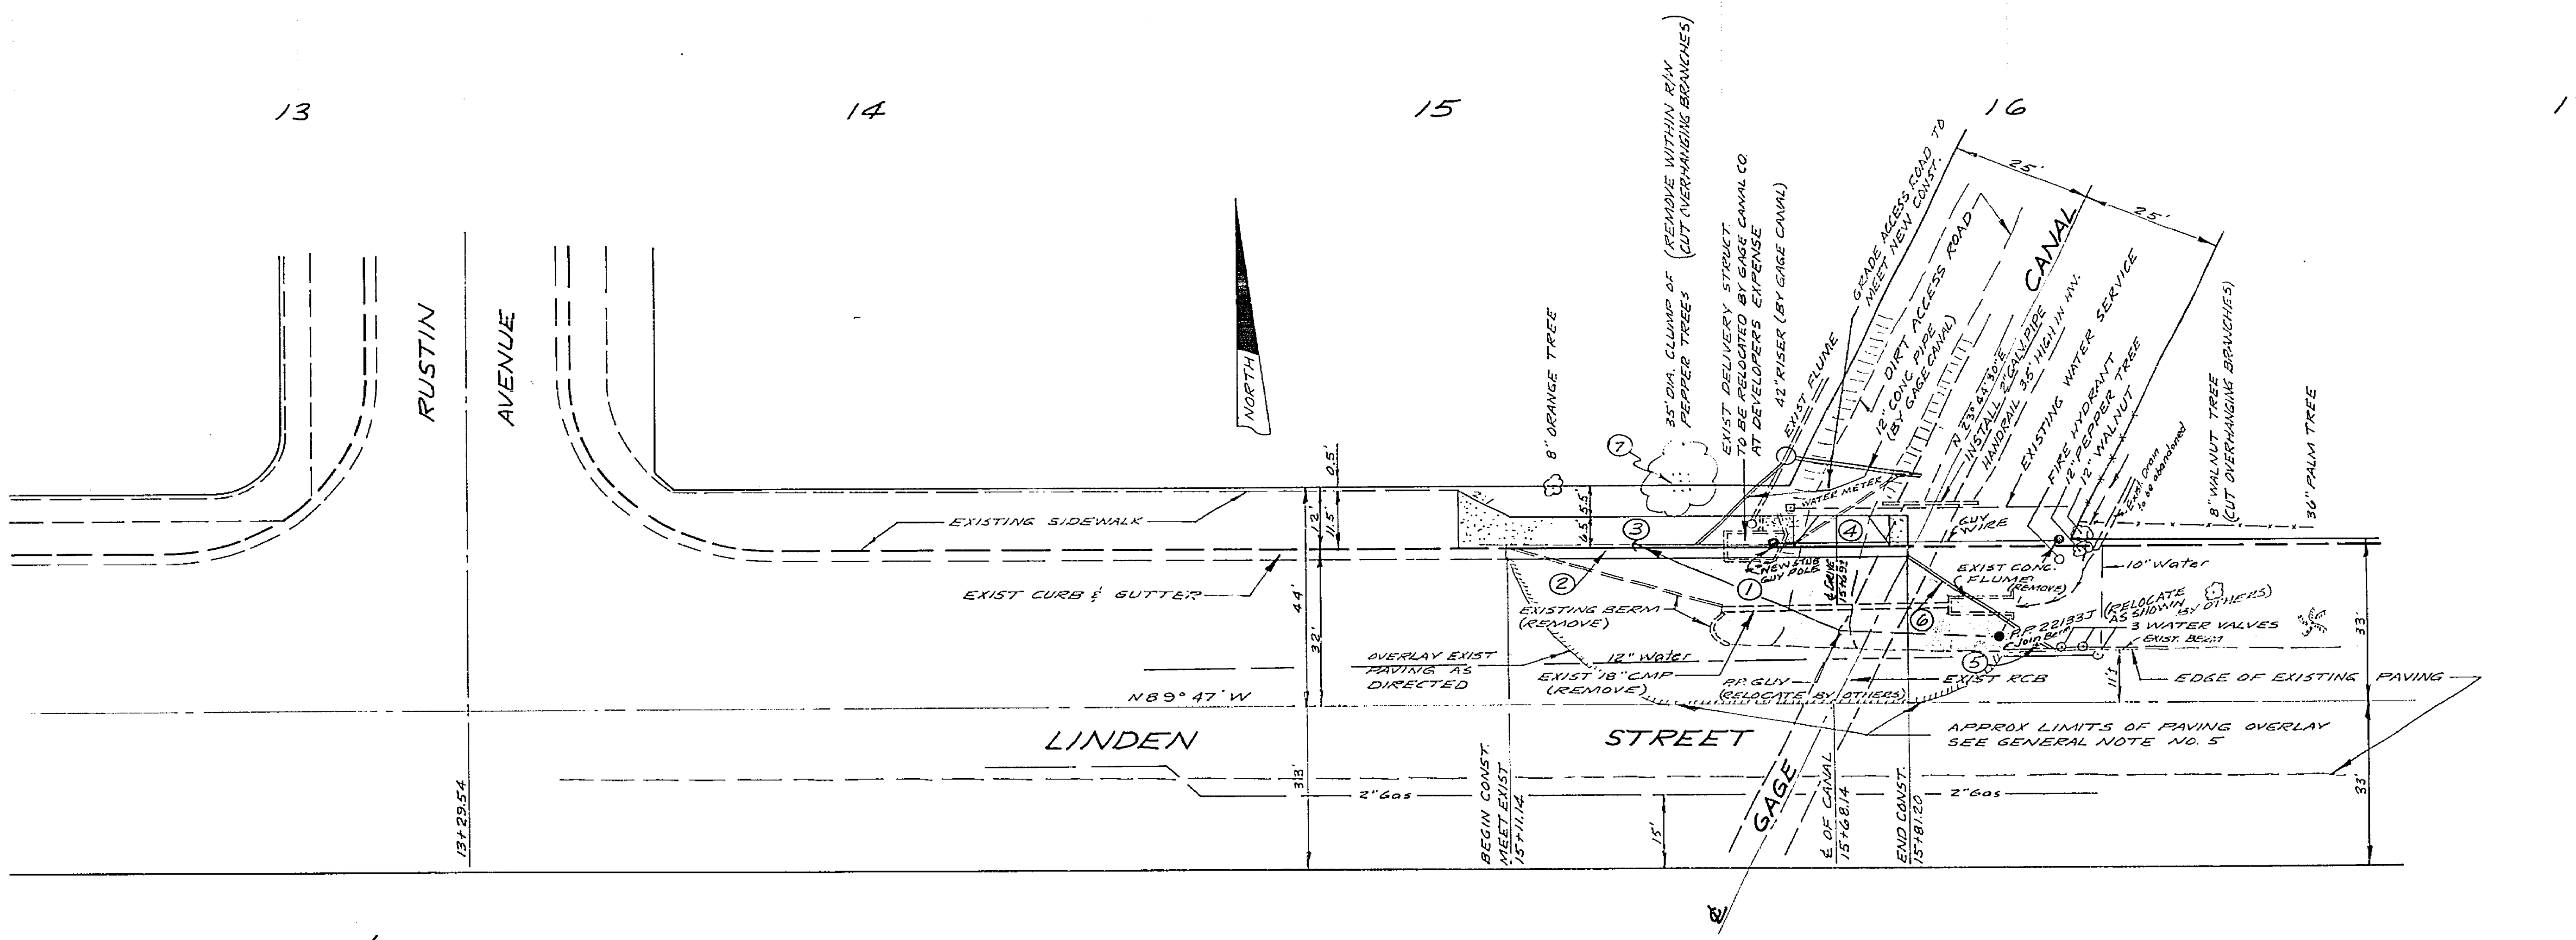

GENERAL NOTES

1. It shall be the responsibility of the contractor to clear the right of way in accordance with the provisions of the law as it affects each utility including irrigation lines and appurtenances and at no cost to the city.
2. Construction shall be in accordance with City of Riverside, Department of Public Works, Specifications No. 461 and Standard Drawings.
3. Prime coat, seal coat and paint binder are required.
4. Grading will require a permit under Ordinance 3093 for a cut or fill exceeding 100 cubic yards or a fill over one foot in depth.
5. Trim edge of existing pavement where new paving joins existing pavement to clean, straight edge. Construct match-up paving as shown and overlay as directed in the field to produce a smooth crown section. Engineer estimate of pavement overlay is 55 tons.
6. Check with Street Light Engineer for street light requirements at 787-7429 prior to constructing sidewalk.
7. The finished sub-grade shall have a compaction of not less than 90% for a depth of 0.5 feet as determined by test method No. "Calif. 216" immediately prior to placement of the cover.

CONSTRUCTION NOTES

1. Const 3½" A.C. over 4" Class 3 Aggregate Base or 2½" A.C. over 4" Class 2 A.B.
2. Const curb & gutter per Std. No. 200 (6" C.F.)
3. Const curb sidewalk per Std. No. 325
4. Const drive approach per Std. No. 302 (a=10', b=17')
5. Install one W-21-R
6. Const 22'± of 2"x 4" Redwood Header
7. Remove trees within right-of-way and/or remove overhanging branches.

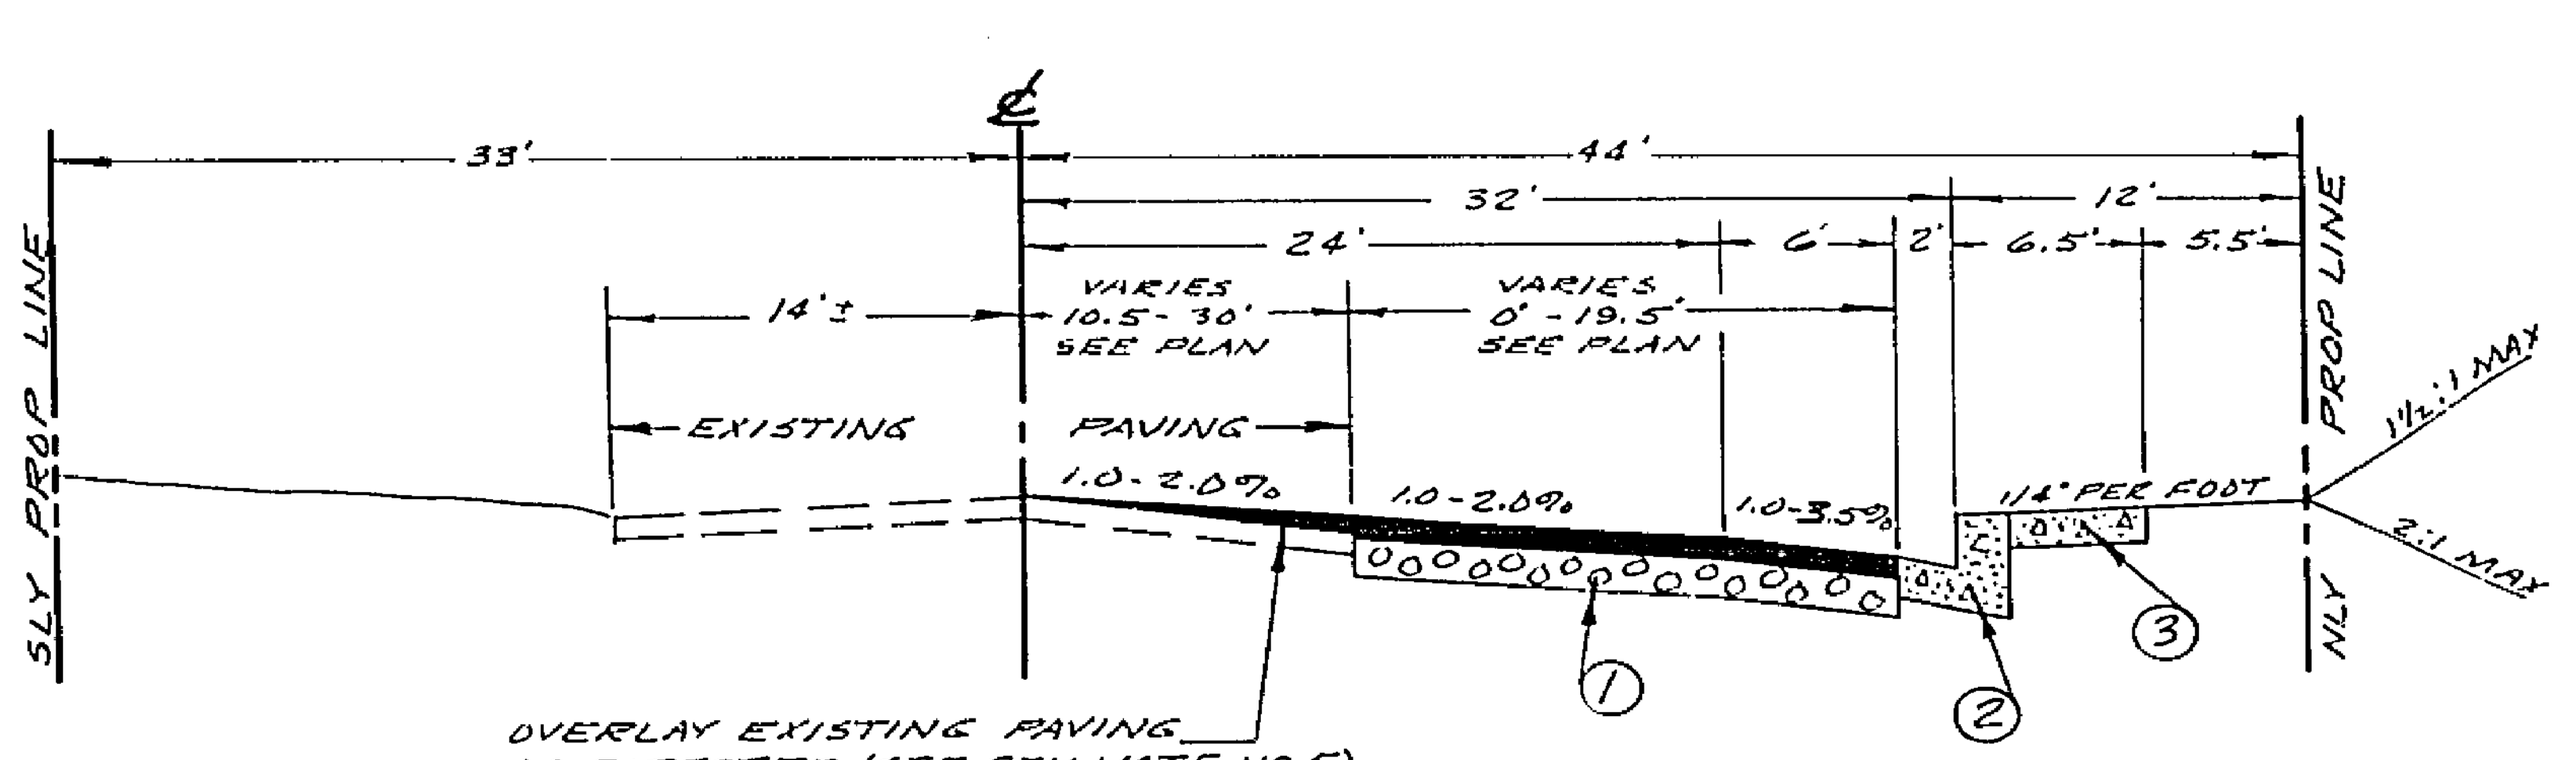

TYPICAL SECTION
LINDEN STREET
NO SCALE
T.I: 6

S.R. #424 R=62

THE GAGE CANAL COMPANY
Approved [signature]
Date 10/3/66

CRAWLEY, HAWKINS & HIEBER
ENGINEERS & SURVEYORS
RIVERSIDE, CALIFORNIA PH. 684-9522

APPROVED George W. Hieber DATE 9/2/66
R.C.E. 14407

J.O. 561 | FOR: GRACE METH. CHURCH | F.B. 60/57

MARK	REVISIONS	APPR.	DATE

DESIGNED BY GW DRAWN BY GW CHECKED BY [illegible]

CITY OF RIVERSIDE, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

APPROVED BY	BY	DATE
OFFICE ENGINEER	[signature]	1-23
PARK DEPARTMENT	—	—
TRAFFIC DIVISION	[signature]	11-30
ASSISTANT CITY ENG.	[signature]	1-27

APPROVED BY [signature]
DIRECTOR OF PUBLIC WORKS
DATE 1-30-67

STREET PLAN & PROFILE
LINDEN STREET
NORTH SIDE
180'-260' ELY OF RUSTIN AVE
C.U.P. C-10-634

HORIZ. SCALE: 1" = 20 VERT. SCALE: 1" = 2

PROJECT NO. R-1195
SHEET 1 OF 1
FILE NO. 4107